

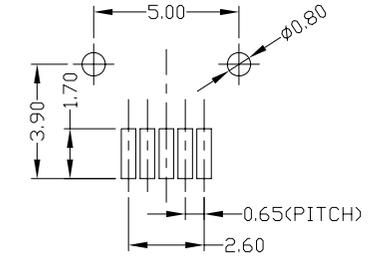
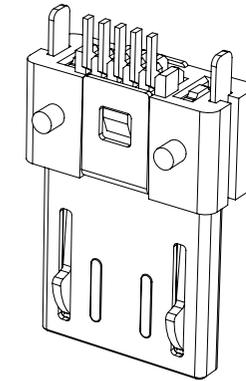
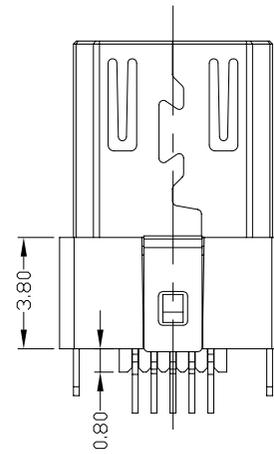
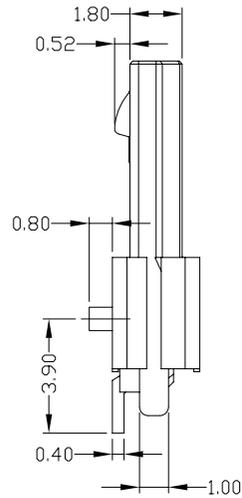


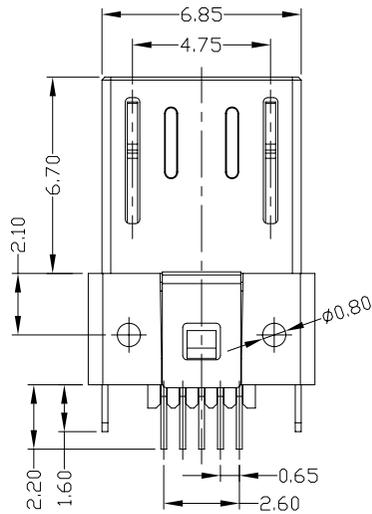

RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

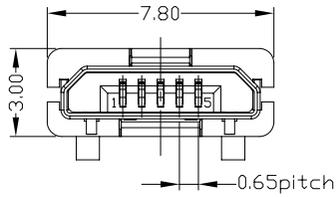

RECOMMENDED PCB LAYOUT



NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 1.5AMP, 250V AC;
  - INSULATION RESISTANCE: 1000MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 500V AC;
  - OPERATING TEMPERATURE: -20°C TO +85°C.
- Mechanical:
  - Mating Force: 35N MAX.
  - Unmating Force: 10N MIN.
- DIMENSIONS MARKED '▼' TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUYM-05\*N-5BVH11  
 1#Au 1U\*  
 6#Au 30U\*  
 1#WHITE  
 8#BLACK  
 1#PBT  
 2#PA6T  
 3#PA9T  
 4#LCP  
 5#PA46

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING			UNITS	东莞市铀高电子制品有限公司							
4	HOOK	STAINLESS STEEL	2		X. ±0.3	X.* ±2*	mm	TITLE: MICRO USB 5P BM 超薄 反向		PART NO.: MUYM-05*N-5BVH11					
3	HOUSING	PA46+30%GF	1		.X ±0.2	.X* ±1*	MAT'L					DR: <i>Ricky</i> 2014/04/23		DWG NO.: AII-VH11	
2	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.15	.XX*	SEE NOTE								
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.10	.XXX*	FINISH	APPD: <i>Ricky</i> 2014/04/23							
					<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.</small>		Q'TY								