

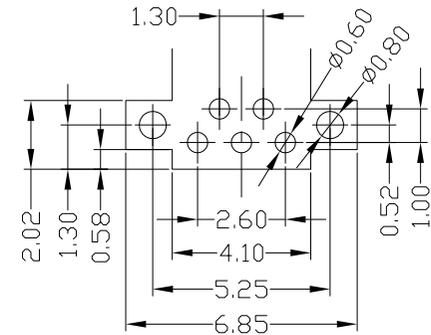
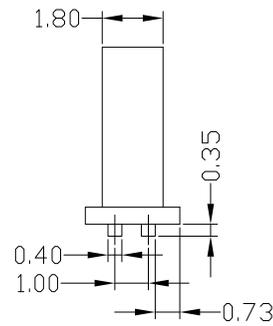


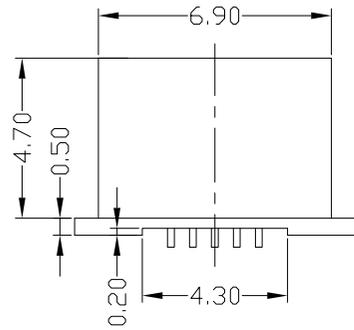


RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

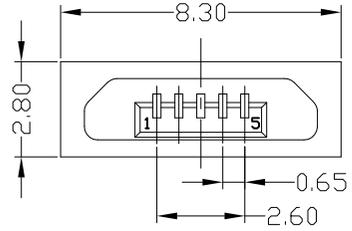

RECOMMENDED PCB LAYOUT

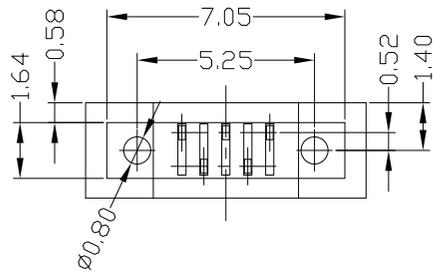

- NOTES:
- ELECTRICAL:
- 1) VOLTAGE CURRENT RATING: 1.5AMP,250V AC;
  - 2) INSULATION RESISTANCE: 1000MΩ MIN;
  - 3) CONTACT RESISTANCE: 30mΩ MAX;
  - 4) WITHSTANDING VOLTAGE: 500V AC;
  - 5) OPERATING TEMPERATURE:-20°C TO +85°C.
- Mechanical:
- 1) Mating Force: 35N MAX
  - 2) Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

- MUYM-05\*0-1BPH10
- 1:Au 1U\*
  - 6:Au 30U\*
  - W:WHITE
  - B:BLACK
  - 1:PBT
  - 2:PA6T
  - 3:PA9T
  - 4:LCP
  - 5:PA46

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.3	X.* ±2*	UNITS	mm	东莞市铀高电子制品有限公司								
2	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.2	.X* ±1*	MAT'L	SEE NOTE	TITLE:	Miro 5P 无线充头			PART NO.:	MUYM-05*0-1BPH10			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XX ±0.15	.XX*	FINISH	SEE NOTE	DR:	gan 2014/04/23			DWG NO.:	AII-PH10			
					.XXX ±0.10	.XXX*	Q'TY	SEE NOTE	CHKD:	gan 2014/04/23			SCALE	1:1			
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.					APPD:			SHEET	1/1	REV.	B	CUSTOMER DRAWING