

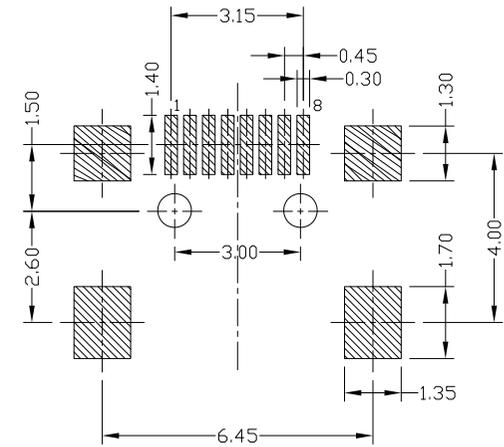

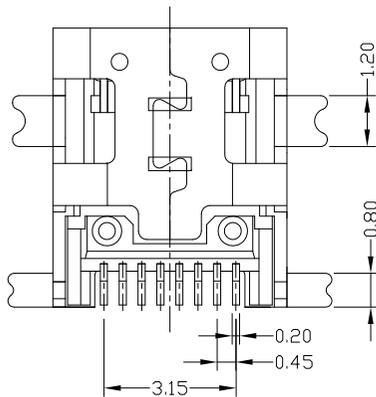


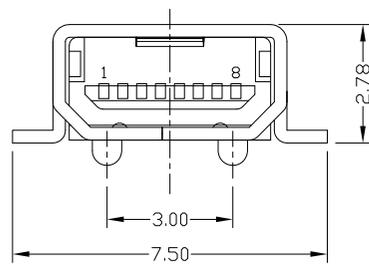

RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

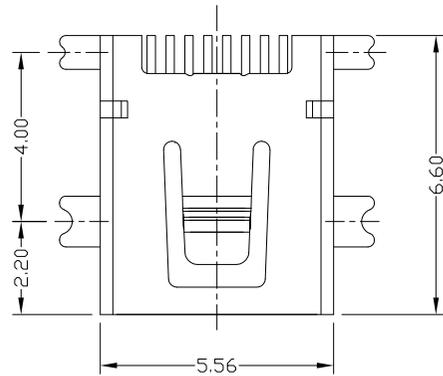

RECOMMENDED PCB LAYOUT

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V DC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 1N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUBF-08*N-4BV82
 1:Au 1U"
 6:Au 30U"
 N:NICKEL
 G:GOLD
 W:WHITE
 B:BLACK
 1:PBT
 2:PA6T
 3:PA9T
 4:LCP



Bill of materials:

3	HOUSING	LCP+30%GF	1	UL94V-0	X. ±0.35	X.° ±2°	UNITS mm
2	SHELL	COPPER ALLOY	1	PLATED NICKEL/GOLD	.X ±0.3	.X° ±1°	
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN	.XX ±0.25	.XX°	
NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX°	FINISH SEE NOTE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司			
TITLE: MINI USB 8P/F SMT四脚(横顶/双边倒角)		PART NO.: MUBF-08*N-4BV82	
DR: gan 2017/05/03		DWG NO.: AII-V82	
CHKD: gan 2017/05/03		SCALE	SHEET
APPD:	1:1	1/1	REV. B
		CUSTOMER	DRAWING

