

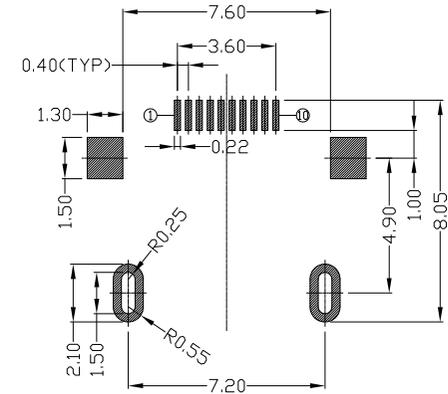

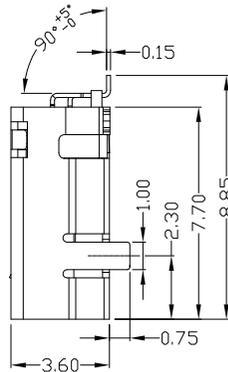
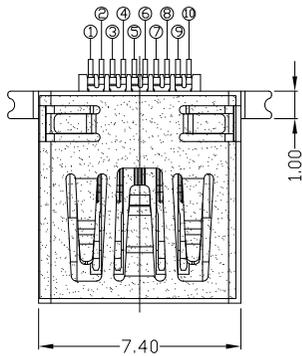





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

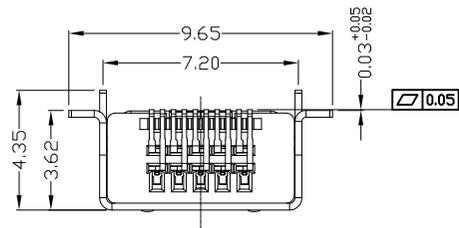

RECOMMENDED PCB LAYOUT



NOTES:

1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 1.0AMP,100V AC;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 50mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC;
 - 5) OPERATING TEMPERATURE:-30°C TO +80°C.
2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 7N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



4.PART NO.

MUNF-101T-4BVS19-M
 1:Au 1U"
 6:Au 30U"
 W:WHITE
 B:BLACK
 1PBT
 2:PA6T
 3:PA9T
 4:LCP

Bill of materials:

E	3	HOUSING	LCP+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	UNITS	mm	东莞市铀高电子制品有限公司	
	2	SHELL	STAINLESS STEEL	1	PLATED TIN	.X ±0.3	.X' ±1'	MAT'L	SEE NOTE		
	1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN	.XX ±0.25	.XX'	FINISH	SEE NOTE		
	NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX'	Q'TY	SEE NOTE		
<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.</p>										<p>TITLE: MINI USB 10PIN PHILIPS 母座AB TYPE 无柱(短体)</p> <p>DR: gan 2014/09/25</p> <p>CHKD: gan 2014/09/25</p> <p>APPD:</p>	<p>PART NO.:</p> <p>MUNF-101T-4BVS19-M</p> <p>DWG NO.:</p> <p>AII-VS19-M</p> <p>SCALE SHEET REV. CUSTOMER DRAWING</p> <p>1:1 1/1 B</p>