

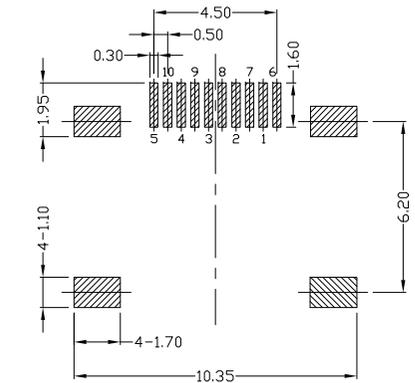
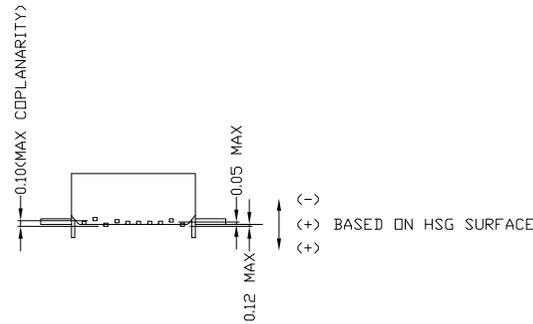


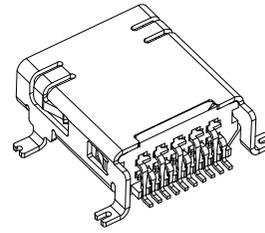




RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

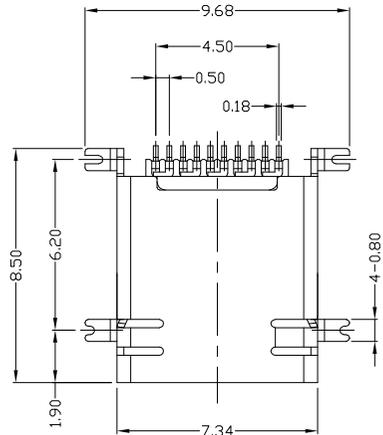

RECOMMENDED PCB LAYOUT(TOP SIDE)

TOLERANCE=±0.05

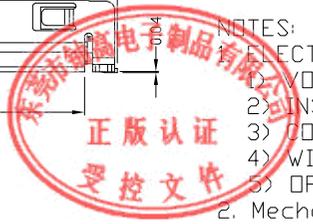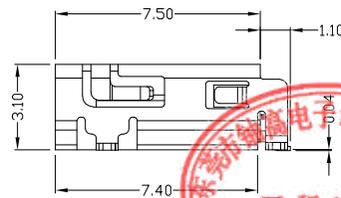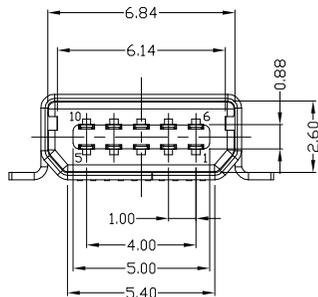

- NOTES:
- 1) ELECTRICAL:
    - 1) VOLTAGE CURRENT RATING: 1.0AMP,100V AC;
    - 2) INSULATION RESISTANCE: 100MΩ MIN;
    - 3) CONTACT RESISTANCE: 50mΩ MAX;
    - 4) WITHSTANDING VOLTAGE: 100V AC;
    - 5) OPERATING TEMPERATURE:-30°C TO +80°C.
  2. Mechanical:
    - 1) Mating Force: 35N MAX
    - 2) Unmating Force: 7N MIN.
  3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUNF-101T-4BVS40

1:Au 1U"  
6:Au 30U"

W:WHITE  
B:BLACK  
1:PBT  
2:PA6T  
3:PA9T  
4:LCP

Bill of materials:

E	3	HOUSING	LCP+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	UNITS	mm	东莞市铷高电子制品有限公司					
	2	SHELL	COPPER ALLOY	1	PLATED TIN	.X ±0.3	.X' ±1'	MAT'L	SEE NOTE						
	1	TERMINAL	COPPER ALLOY	10	PLATED GOLD/TIN	.XX ±0.25	.XX'	FINISH	SEE NOTE	TITLE:	PART NO.:				
	NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX'	Q'TY	SEE NOTE	MINI USB 10PIN FEMALE SMT TYPE	MUNF-101T-4BVS40				
						THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				DR:	gan 2018/07/12	DWG NO.:	AII-VS40		
										CHKD:	gan 2018/07/12	SCALE	SHEET	REV.	CUSTOMER
										APPD:		1:1	1/1	B	DRAWING