
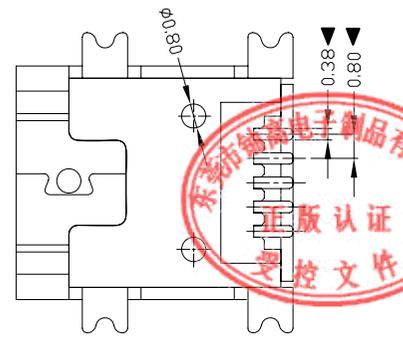


REV.	ECN.	NO.	APPD.

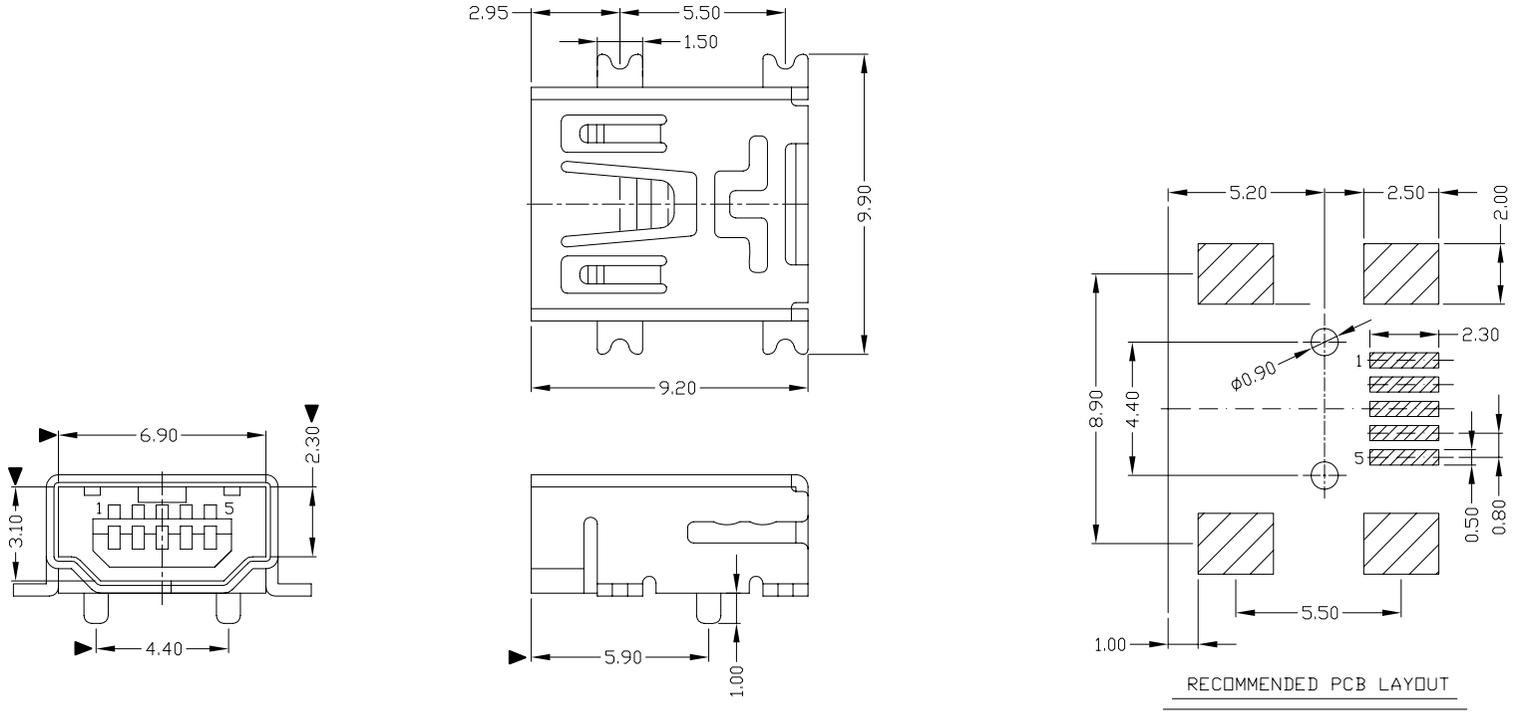

- NOTES:
- ELECTRICAL:
    - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
    - INSULATION RESISTANCE: 100M $\Omega$  MIN;
    - CONTACT RESISTANCE: 50m $\Omega$  MAX;
    - WITHSTANDING VOLTAGE: 300V AC;
    - OPERATING TEMPERATURE:-55°C TO +85°C.
  - Mechanical:
    - Mating Force: 30N MAX
    - Unmating Force: 7N MIN.
  - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.  
 MUAF-05\*N-4BH80  
 1:Au 1U"  
 6:Au 30U"  
 W:WHITE  
 B:BLACK  
 1:PBT  
 2:PA6T  
 3:PA9T  
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X.	X.*	UNITS
3	HOUSING	LCP	1	UL94V-0	X. $\pm 0.35$	X.* $\pm 2^*$	mm
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX $\pm 0.25$	.XX*	SEE NOTE
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX $\pm 0.15$	.XXX*	SEE NOTE
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY

**东莞市铀高电子制品有限公司**  
 TITLE: MINI USB 5P/F SMT(A型1.0柱)  
 PART NO.: MUAF-05\*N-4BH80  
 DR: gan 2012/7/02  
 DWG NO.: AII-H80  
 CHKD: gan 2012/7/02  
 APPD:  
 SCALE: 1:1  
 SHEET: 1/1  
 REV.: B  
 CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.