

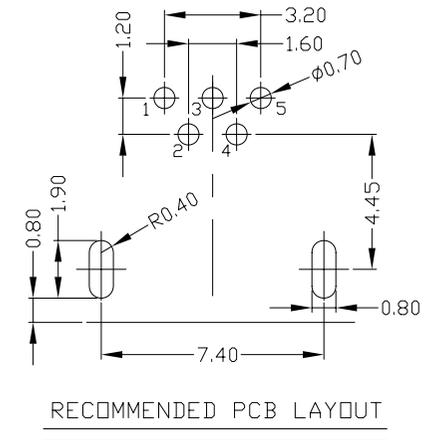

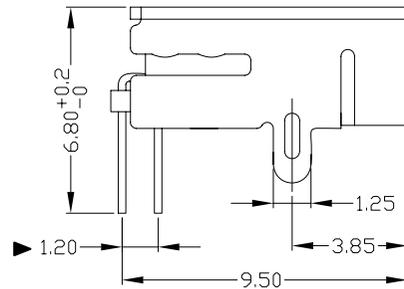





RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD



端子正位度以不影响插板为主，所有尺寸只做辅助管控作用，端子高低不平按 MAX 0.30管控



- NOTES:
- 1) ELECTRICAL:
- 1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 50mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 300V AC;
 - 5) OPERATING TEMPERATURE:-55°C TO +85°C.
- 2) Mechanical:
- 1) Mating Force: 30N MAX
 - 2) Unmating Force: 7N MIN.
 3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
MUNF-05*N-4BR83

W:WHITE
B:BLACK

1:Au 1U"
6:Au 30U"

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司									
3	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.' ±2'	TITLE: MINI USB 5P/F90° AB型两脚 (端子脚加长)	PART NO.: MUNF-05*N-4BR83								
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X' ±1'						DR: gan 2015/1/21	DWG NO.: AII-R83			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XX ±0.25	.XX'						CHKD: gan 2015/1/21	SCALE	SHEET	REV.	CUSTOMER DRAWING
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC.	Q'TY	APPD:	1:1	1/1	B						