




RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

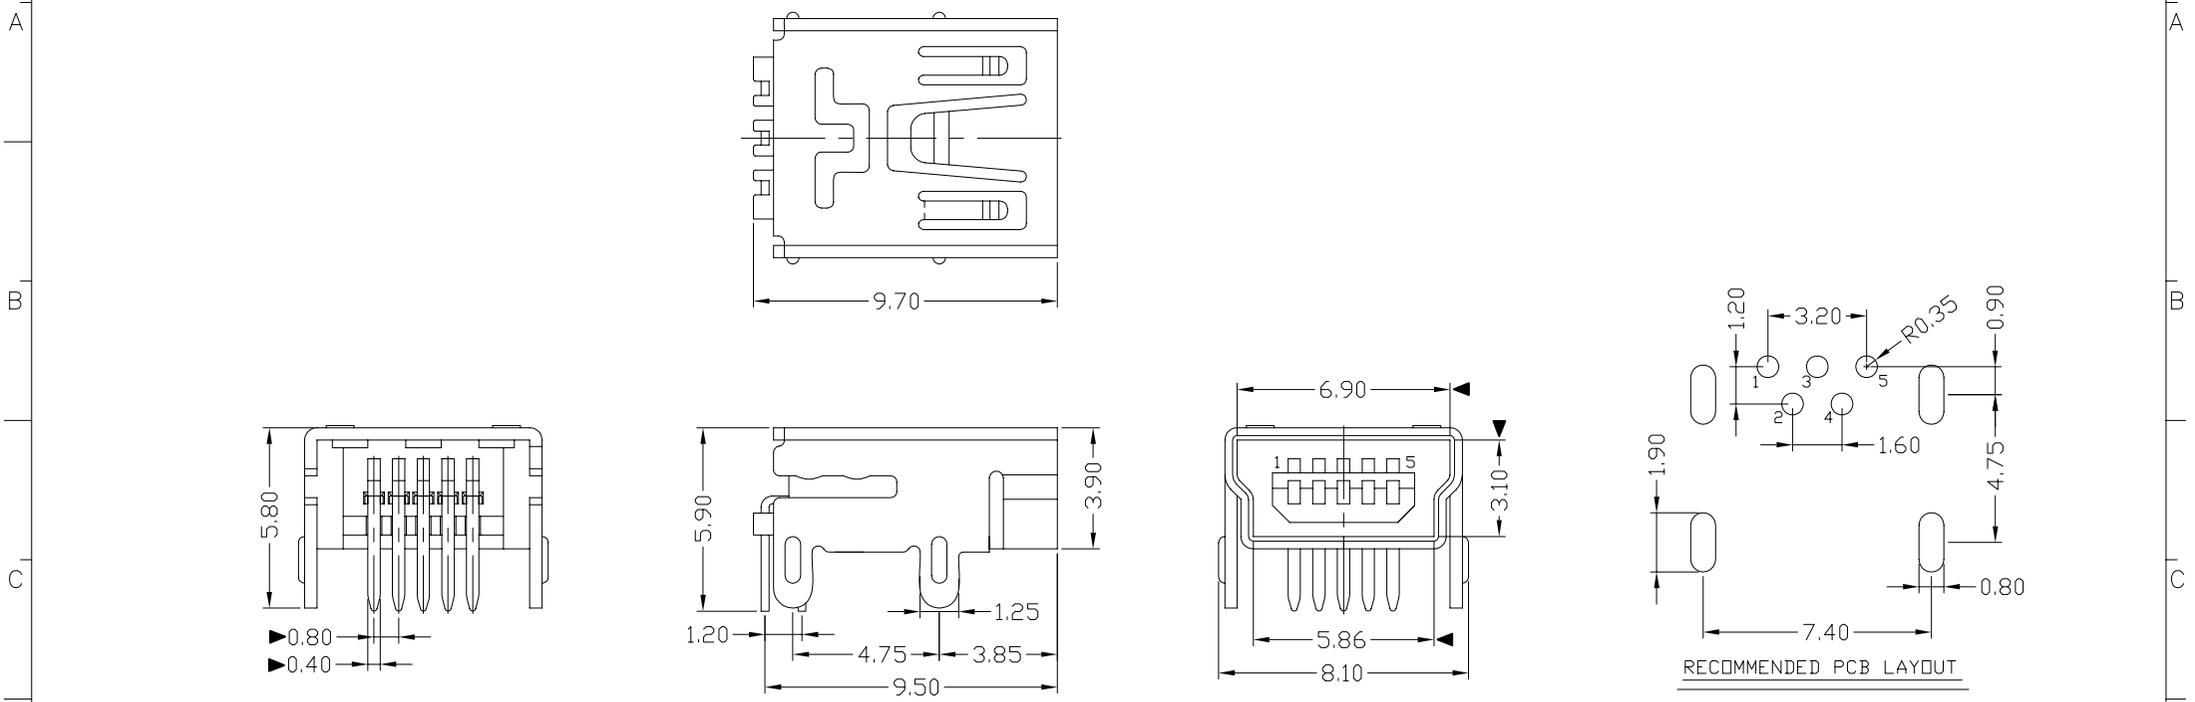

NOTES:
 1. ELECTRICAL:
 1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 2) INSULATION RESISTANCE: 100MΩ MIN;
 3) CONTACT RESISTANCE: 50mΩ MAX;
 4) WITHSTANDING VOLTAGE: 300V AC;
 5) OPERATING TEMPERATURE:-55°C TO +85°C.
 2. Mechanical:
 1) Mating Force: 30N MAX
 2) Unmating Force: 7N MIN.
 3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
 MUBF-05*N-4BR80
 1:W:WHITE
 2:B:BLACK
 1:1PBT
 2:2PA6T
 3:3PA9T
 4:4LCP
 1:Au 1U"
 6:Au 30U"

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司				
3	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.* ±2*	MAT'L	TITLE: MINI USB 5P/F 90° B型四脚		PART NO.: MUBF-05*N-4BR80	
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X* ±1*	SEE NOTE	DR: gan 2012/7/02		DWG NO.: AII-R80	
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XX ±0.25	.XX*	FINISH	CHKD: gan 2012/7/02		SCALE	SHEET
					.XXX ±0.15	.XXX*	SEE NOTE	APPD: gan 2012/7/02		1:1	1/1
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	APPD:	REV. B	CUSTOMER DRAWING	