



RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.






A

B


C

D

E

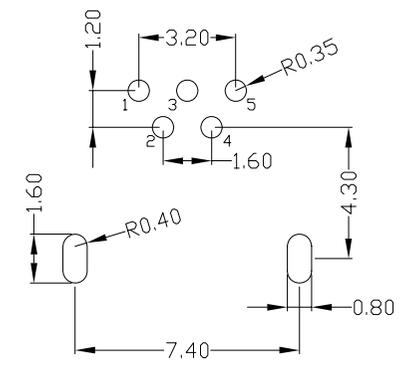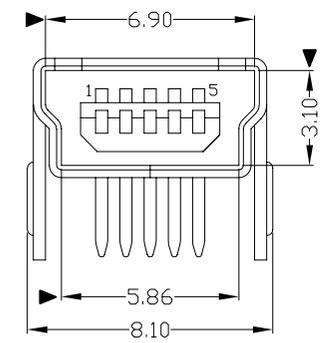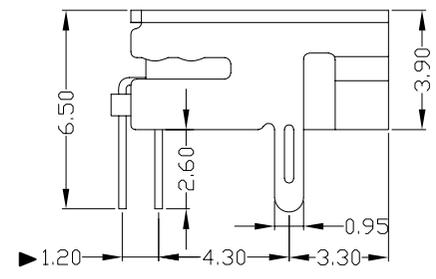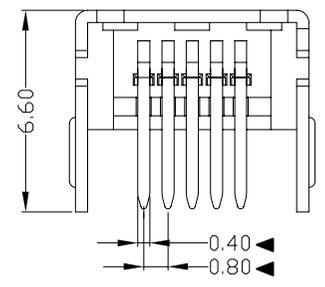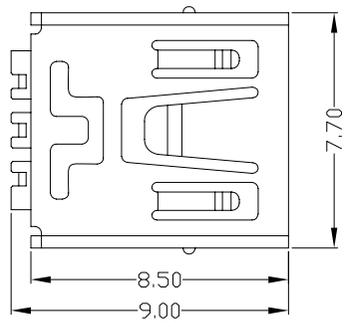

RECOMMENDED PCB LAYOUT

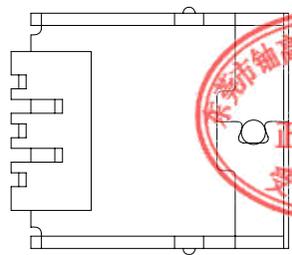

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
 - Mechanical:
 - Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
MUBF-05*N-4BR86
1:Au 1U* 1PBT
6:Au 30U* 2PA6T 3PA9T 4LCP
W:WHITE B:BLACK

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	东莞市铰高电子制品有限公司					
					.X ±0.3	.X.* ±1*	mm						
3	HOUSING	LCP	1	UL94V-0	.XX ±0.25	.XX*	MAT'L	TITLE:	PART NO.:				
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.15	.XXX*	SEE NOTE	MINI USB 5P/F 90° B型(两脚加长)	MUBF-05*N-4BR86				
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	FINISH			DR:	DWG NO.:				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.					SEE NOTE			CHKD:	AII-R86				
					Q'TY			APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING	
								1:1		1/1	B		