



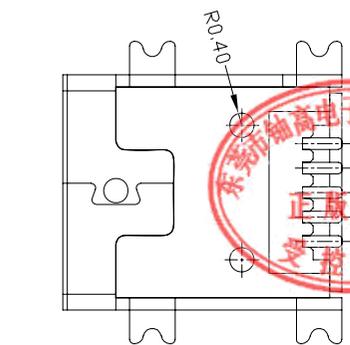

RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

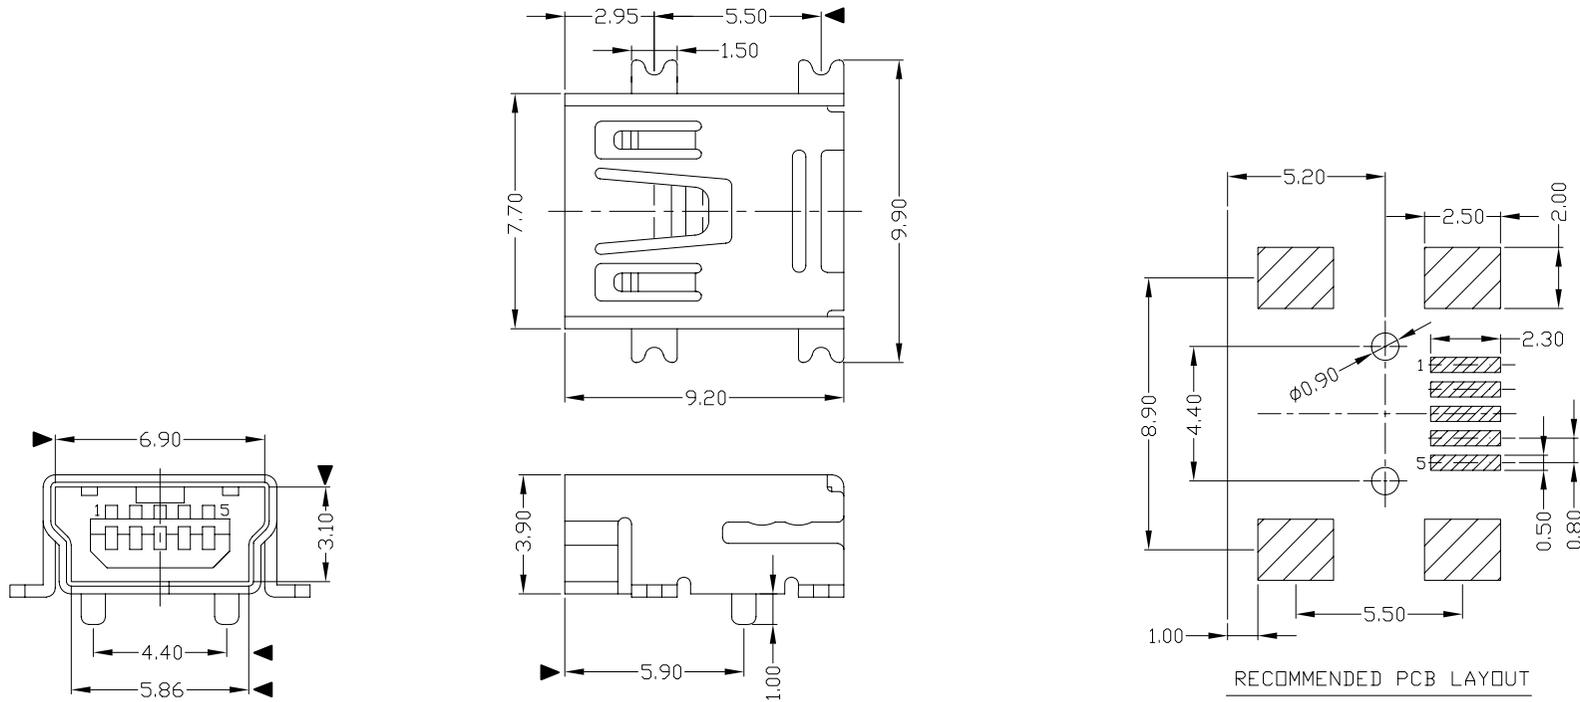

NOTES:

1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - 2) INSULATION RESISTANCE: 100M Ω MIN;
 - 3) CONTACT RESISTANCE: 50m Ω MAX;
 - 4) WITHSTANDING VOLTAGE: 300V AC;
 - 5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
 - 1) Mating Force: 30N MAX
 - 2) Unmating Force: 7N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUBF-05*N-4BH82

- 1:Au 1U*
- 6:Au 30U*
- W:WHITE
- B:BLACK
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司						
3	HOUSING	LCP	1	UL94V-0	X. ± 0.35	X.* $\pm 2^*$	MAT'L	TITLE:		PART NO.:			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ± 0.25	.XX* $\pm 1^*$	SEE NOTE	MINI USB 5P/F SMT(B型1.0柱)		MUBF-05*N-4BH82			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ± 0.15	.XXX*	FINISH	DR: gan 2012/7/02		DWG NO.:			
							SEE NOTE	CHKD: gan 2012/7/02		AII-H82			
							Q'TY	APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
										1:1	1/1	B	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.

