



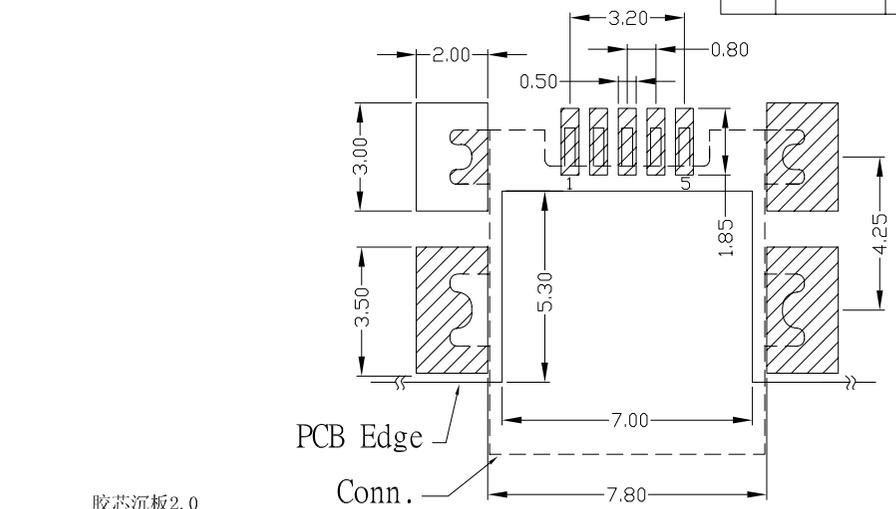

RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

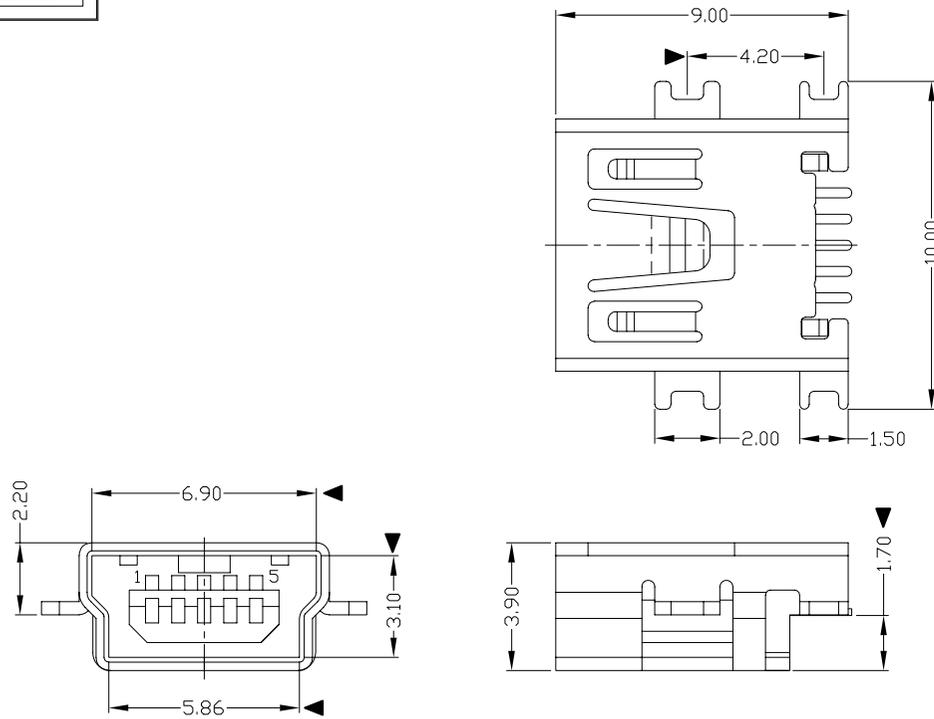

RECOMMENDED PCB LAYOUT

- NOTES:
- 1) ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 50mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 300V AC;
 - 5) OPERATING TEMPERATURE:-55°C TO +85°C.
 - 2) Mechanical:
 - 1) Mating Force: 30N MAX
 - 2) Unmating Force: 7N MIN.
 3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
MUBF-05*N-4BH84
W:WHITE
B:BLACK
1:Au 1U*
6:Au 30U*
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司						
3	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.* ±2*	MAT'L	TITLE:		PART NO.:			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X* ±1*	SEE NOTE	MINI USB 5P/F SMT B型 (沉板1.7mm)		MUBF-05*N-4BH84			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XX ±0.25	.XX*	FINISH	DR: gan 2012/7/02		DWG NO.:			
					.XXX ±0.15	.XXX*	SEE NOTE	CHKD: gan 2012/7/02		AII-H84			
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.		Q'TY	APPD: gan 2012/7/02		SCALE	SHEET	REV.	CUSTOMER DRAWING
								1:1	1/1	B			