

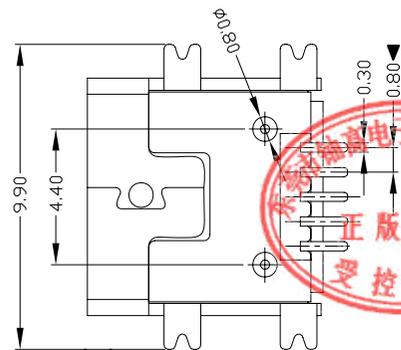


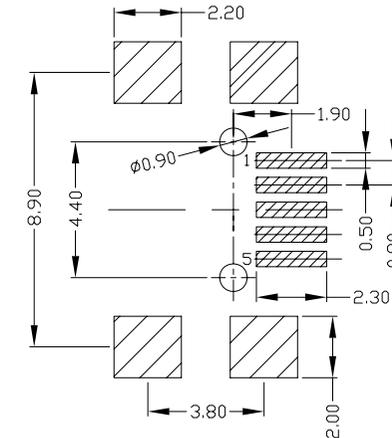

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

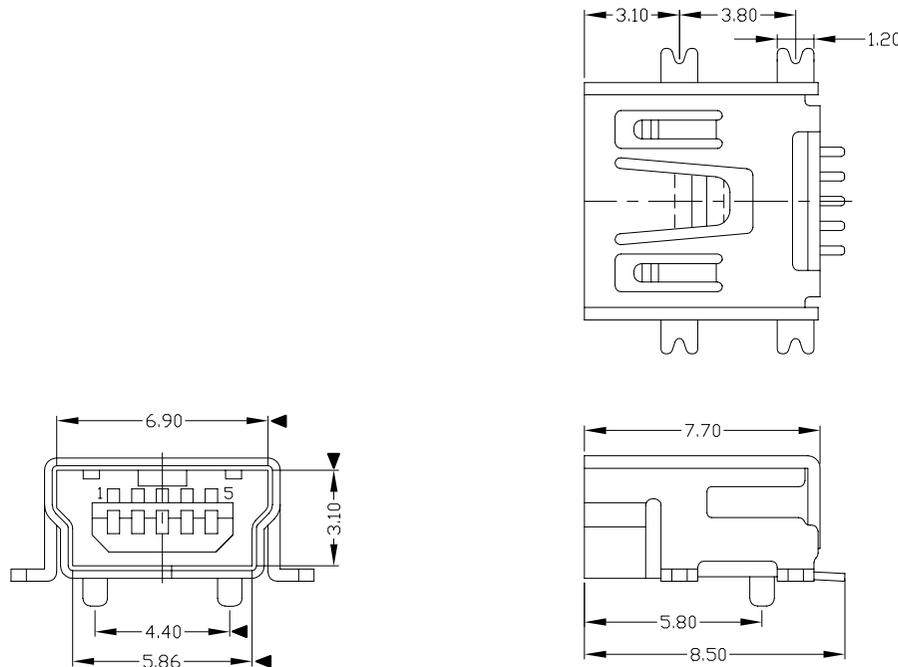

NOTES:

- ELECTRICAL:
- VOLTAGE CURRENT RATING: 1.0AMP, 30V AC;
 - INSULATION RESISTANCE: 100M Ω MIN;
 - CONTACT RESISTANCE: 50m Ω MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
- Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUBF-05*N-4BH86

1: Au 1U*
6: Au 30U*

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ± 0.35	X.* $\pm 2^*$	UNITS	mm	东莞市铀高电子制品有限公司						
3	HOUSING	LCP	1	UL94V-0	.X ± 0.3	.X* $\pm 1^*$	MAT'L	SEE NOTE	TITLE:	PART NO.:					
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ± 0.25	.XX*	FINISH	SEE NOTE	MINI USB 5P/F SMT (短体)	MUBF-05*N-4BH86					
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ± 0.15	.XXX*	Q'TY	SEE NOTE	DR:	gan 2012/7/02		DWG NO.:	AII-H86		
<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.</p>									CHKD:	gan 2012/7/02		SCALE	SHEET	REV.	CUSTOMER DRAWING
									APPD:			1:1	1/1	B	