
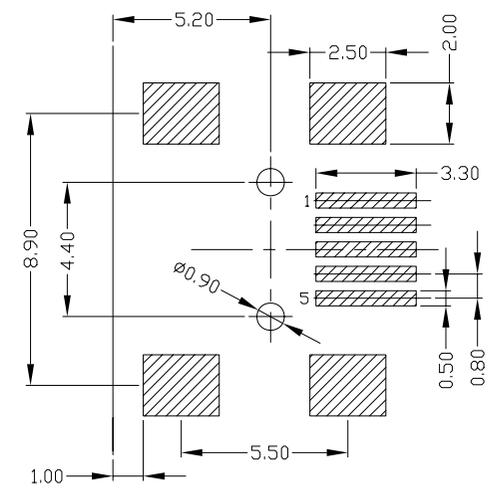
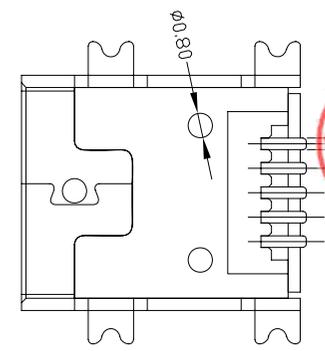
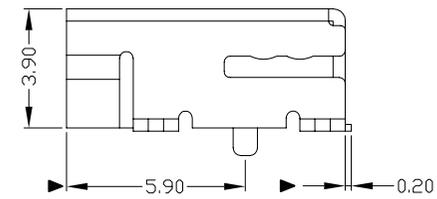
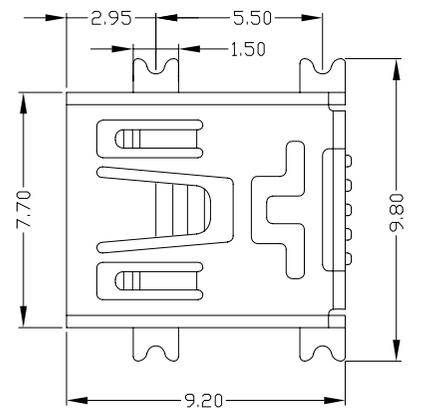


REV.	ECN. NO.	APPD.

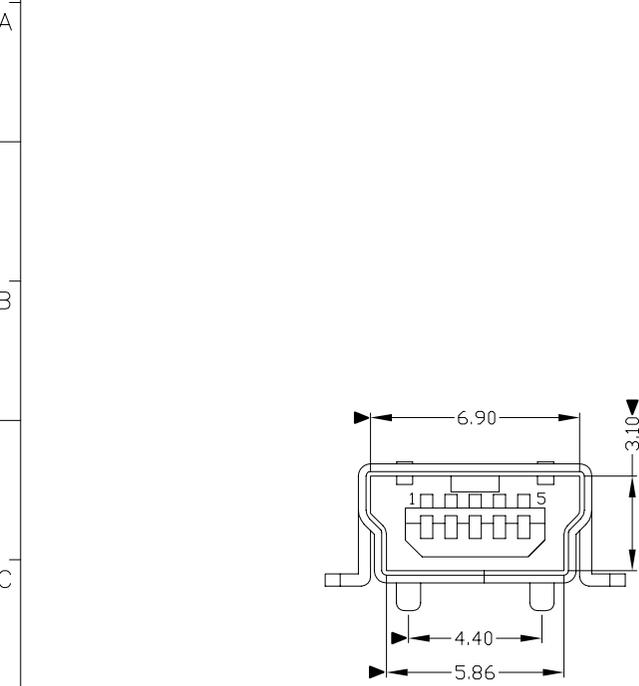

RECOMMENDED PCB LAYOUT

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
 - Mechanical:
 - Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
 - PART NO.

MUBF-05*N-4BH803

- W:WHITE
 - B:BLACK
 - 1:PA6T
 - 2:PA6T
 - 3:PA9T
 - 4:LCP
- 1:1Au 1U"
6:1Au 30U"

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	mm
3	HOUSING	LCP	1	UL94V-0	.X ±0.3	.X.* ±1*	MAT'L	
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	SEE NOTE	
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	FINISH	
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			
							Q'TY	

东莞市铀高电子制品有限公司

TITLE: MINI USB 5P/F SMT B型 (端子加长0.2/1.0柱)	PART NO.: MUBF-05*N-4BH803
DR: gan 2012/7/02	DWG NO.: AII-H803
CHKD: gan 2012/7/02	SCALE SHEET REV. CUSTOMER DRAWING
APPD:	1:1 1/1 B