



RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.






A

B

C

D

E

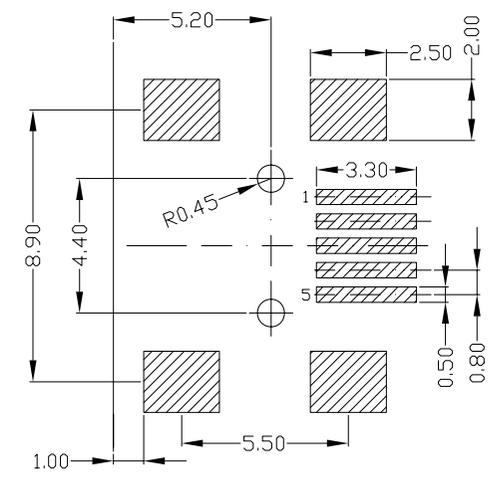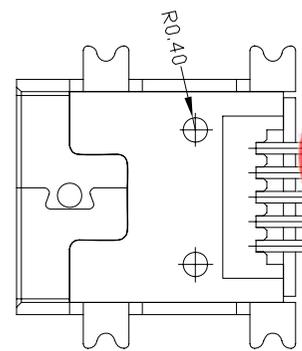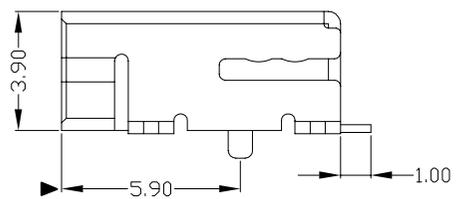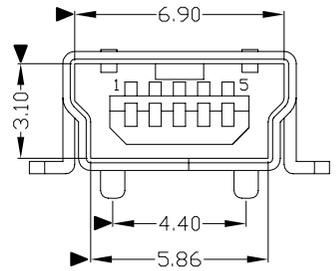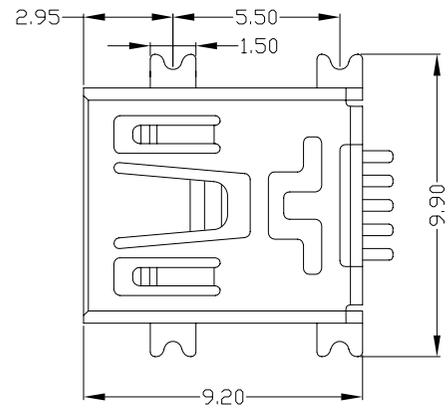

RECOMMENDED PCB LAYOUT

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
 - Mechanical:
 - Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
4. PART NO.

MUBF-05*N-4BH804

- W:WHITE
 - B:BLACK
 - 1PBT
 - 2PA6T
 - 3PA9T
 - 4LCP
- 1Au 1U*
6Au 30U*

Bill of materials:

3	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS	mm	东莞市铷高电子制品有限公司			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X* ±1*	MAT'L	SEE NOTE				
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	FINISH	SEE NOTE	DR:	gan 2012/7/02		
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY	CHKD:	gan 2012/7/02		
								APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
									1:1	1/1	B	DRAWING

