

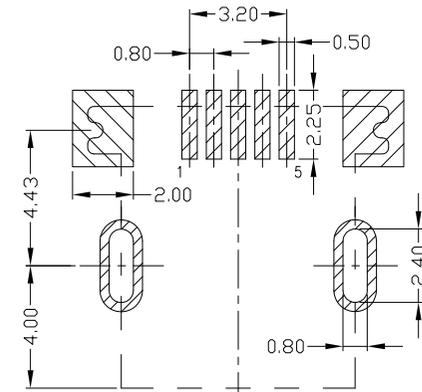
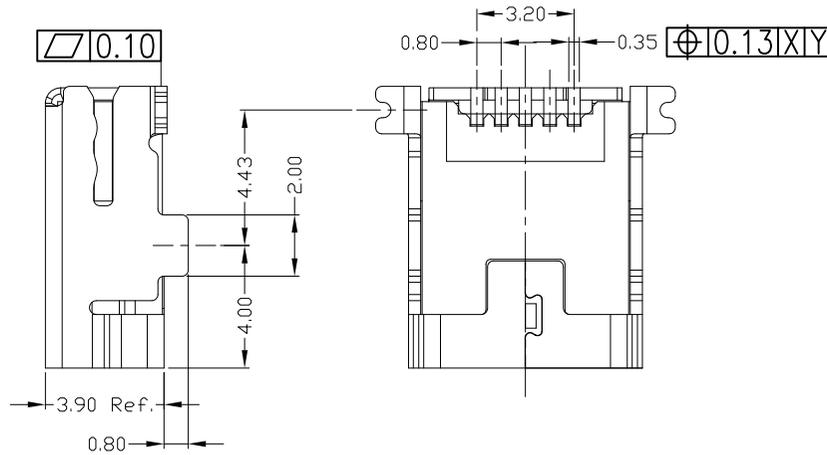
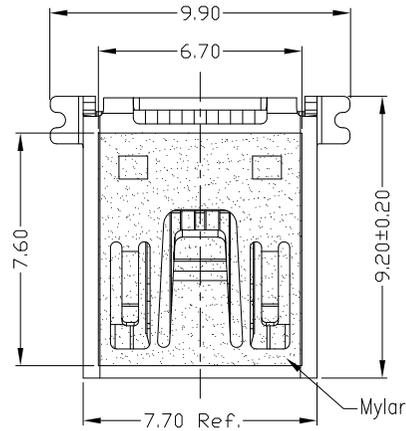


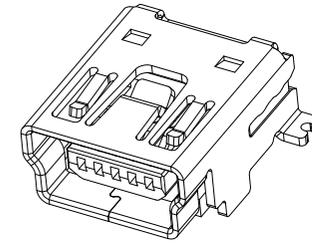


RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

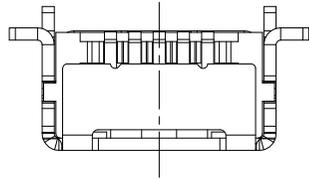

RECOMMENDED P.C.B LAYOUT

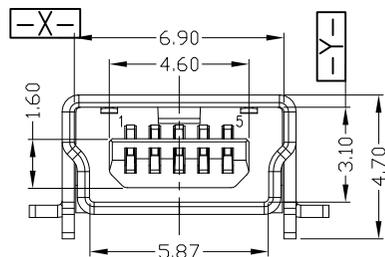


NOTES:

- 1) ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 50mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 300V AC;
 - 5) OPERATING TEMPERATURE: -25°C TO +85°C.
- 2) Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 7N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUBF-05*N-4BHUA151-M



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING											
5					.X ±0.15	Ang1°	UNITS	mm	东莞市铀高电子制品有限公司						
4					.XX ±0.10		MAT'L								
3	SHELL	COPPER ALLOY	1	PLATED NICKEL/TIN	.XXX ±0.05		SEE NOTE		TITLE:	PART NO.:					
2	HOUSING	LCP+30%GF	1	UL94V-0			FINISH		MINI USB 5P F SMT B Type	MUBF-05XN-4BHUA151-M					
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN			SEE NOTE		前插后贴无柱贴麦拉	DR:	Ricky 2017/10/06	DWG NO.:	AII-HUA151		
							Q'TY		CHKD:	Ricky 2017/10/06		SCALE	SHEET	REV.	CUSTOMER
									APPD:			4:1	1/1	B	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNDTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNDTECH INC

