

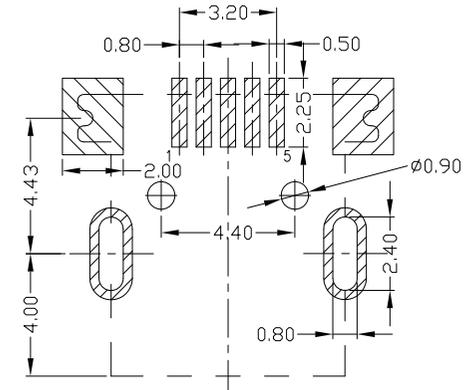
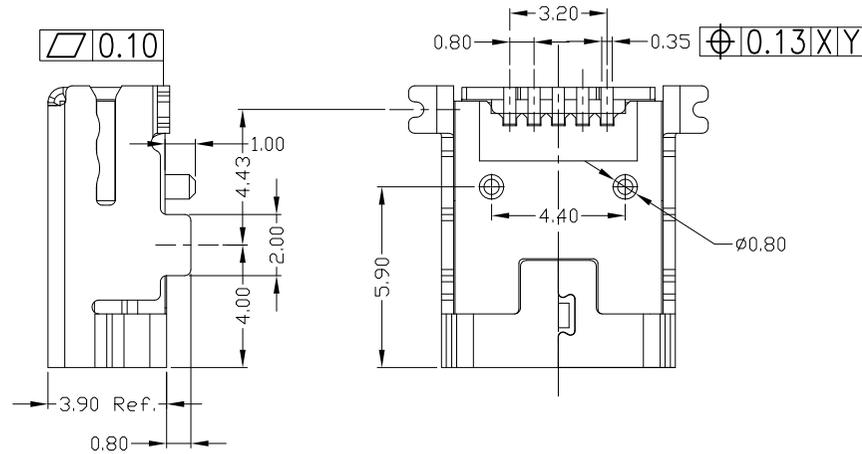


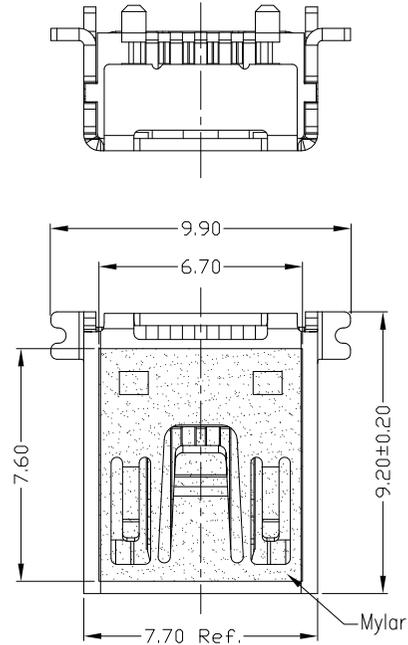


RoHS  
Compliant  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD



RECOMMENDED P.C.B LAYOUT

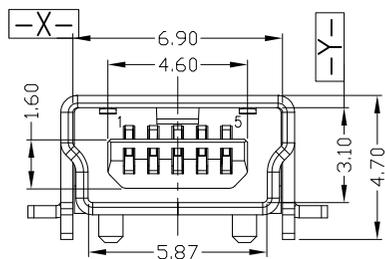


NOTES:

- 1) ELECTRICAL:
  - 1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
  - 2) INSULATION RESISTANCE: 100MΩ MIN;
  - 3) CONTACT RESISTANCE: 50mΩ MAX;
  - 4) WITHSTANDING VOLTAGE: 300V AC;
  - 5) OPERATING TEMPERATURE: -25°C TO +85°C.
2. Mechanical:
  - 1) Mating Force: 35N MAX
  - 2) Unmating Force: 7N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUBF-05\*N-4BHUA353-M



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司					
5				.X ±0.15	Ang1°		TITLE: MINI USB 5P F SMT B Type 前插后贴有柱贴麦拉 PART NO.: MUBF-05XN-4BHUA353-M DR: Ricky 2017/10/11 DWG NO.: AII-HUA353 DWG NO.: AII-HUA353 SCALE: 4:1 SHEET: 1/1 REV: B CUSTOMER DRAWING					
4				.XX ±0.10		MAT'L						
3	SHELL	COPPER ALLOY	1	PLATED NICKEL/TIN		SEE NOTE						
2	HOUSING	LCP+30%GF	1	UL94V-0		FINISH						
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN		SEE NOTE						
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNDTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNDTECH INC							Q'TY	APPD: Ricky 2017/10/11				