

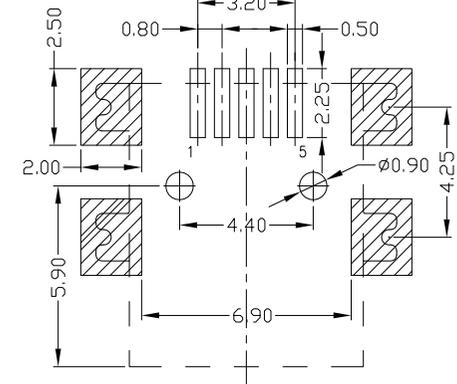

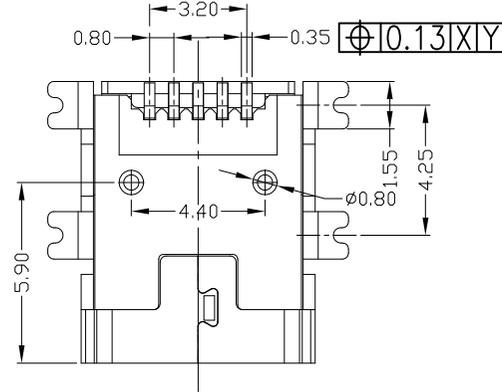



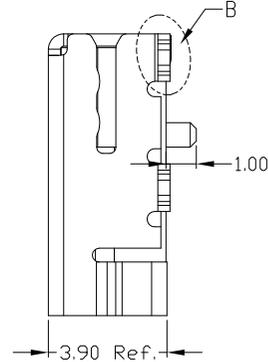


RoHS  
Compliant  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

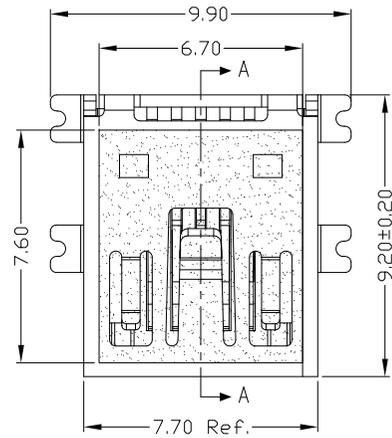

RECOMMENDED P.C.B LAYOUT

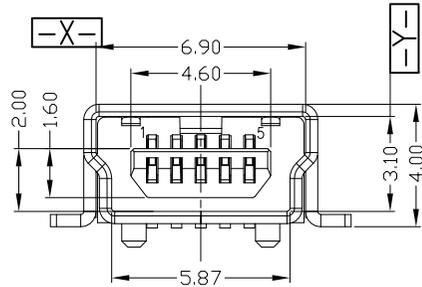


NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 50mΩ MAX;
  - WITHSTANDING VOLTAGE: 300V AC;
  - OPERATING TEMPERATURE: -25°C TO +85°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 7N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUBF-05\***T**-4BHUA152-M



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING									
5					.X ±0.15	Ang1°	UNITS	mm	<b>东莞市铀高电子制品有限公司</b> TITLE: MINI USB 5P F SMT B Type 4.25有柱(Post=1.0H)贴麦拉 PART NO.: MUBF-05XT-4BHUA152-M DR: Ricky 2017/10/11 DWG NO.: AII-HUA152 CHKD: Ricky 2017/10/11 APPD:				
4				.XX ±0.10		MAT'L		SCALE		SHEET	REV.	CUSTOMER	
3	SHELL	COPPER ALLOY	1	PLATED TIN/NICKEL	.XXX ±0.05		SEE NOTE			4:1	1/1	B	DRAWING
2	HOUSING	LCP+30%GF	1	UL94V-0			SEE NOTE						
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN									
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.							Q'TY						