

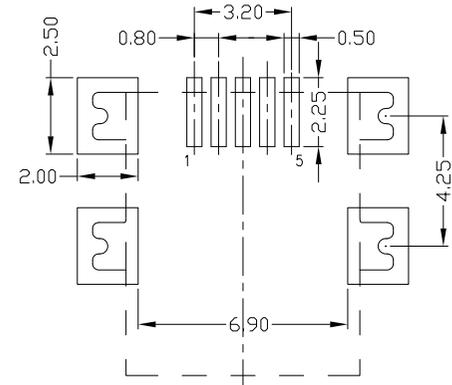

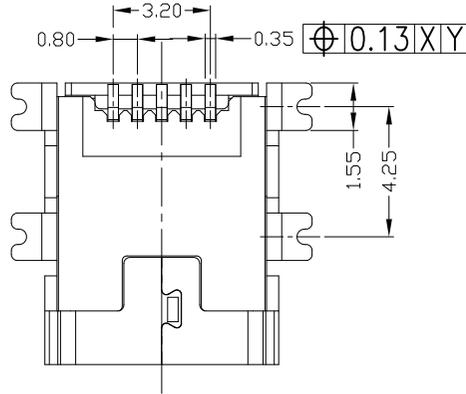



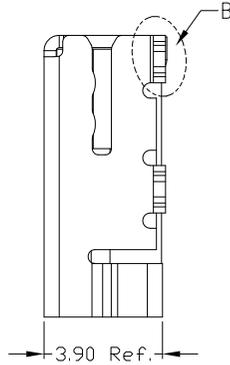


RoHS  
Compliant  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

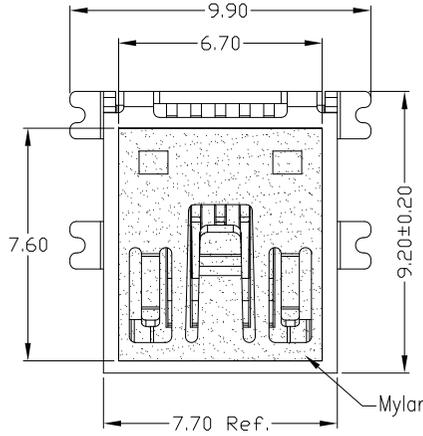

RECOMMENDED P.C.B LAYOUT

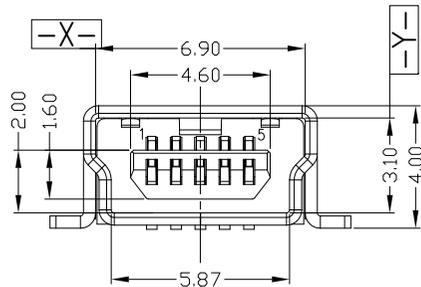


DETAIL B  
(2:1)



- NOTE:
- ELECTRICAL:
    - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
    - INSULATION RESISTANCE: 100MΩ MIN;
    - CONTACT RESISTANCE: 50mΩ MAX;
    - WITHSTANDING VOLTAGE: 300V AC;
    - OPERATING TEMPERATURE: -25°C TO +85°C.
  - Mechanical:
    - Mating Force: 35N MAX
    - Unmating Force: 7N MIN.
  - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUBF-05\*T-4BHUA637-M



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司							
5				.X ±0.15	Ang1°		TITLE: MINI USB 5P F SMT B Type 4.25无柱贴麦拉 PART NO.: MUBF-05XT-4BHUA637-M DR: Ricky 2017/10/11 DWG NO.: AII-HUA637 CHKD: Ricky 2017/10/11 APPD:							
4			.XX ±0.10			SCALE					SHEET	REV.	CUSTOMER	
3	SHELL	COPPER ALLOY	1	PLATED TIN/NICKEL							4:1	1/1	B	DRAWING
2	HOUSING	LCP+30%GF	1	UL94V-0										
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN										
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNDTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNDTECH INC														