

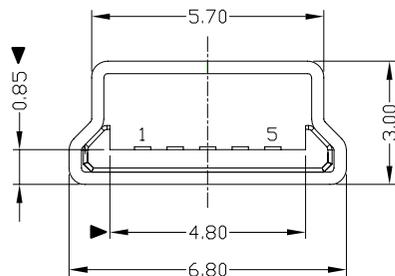
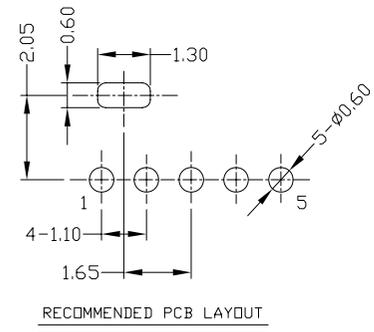


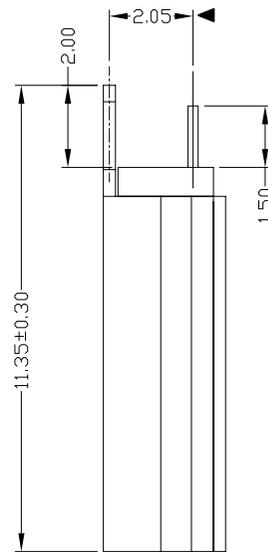

RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

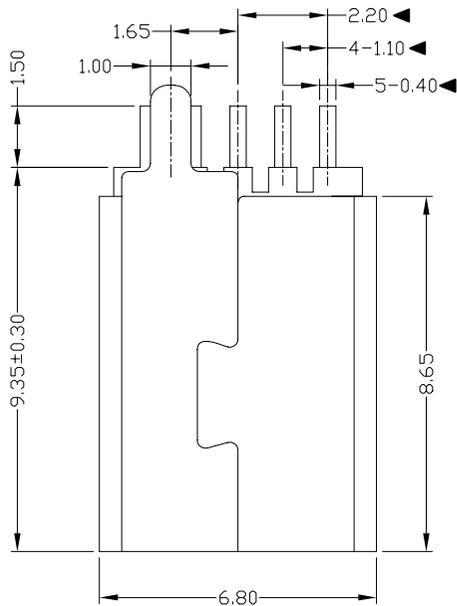

1. ELECTRICAL:
- VOLTAGE CURRENT RATING: 1AMP,30V AC;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 50mΩ MAX;
  - WITHSTANDING VOLTAGE: 300V AC;
  - OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
- Mating Force: 30N MAX
  - Unmating Force: 7N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUBM-05\*N-1BP60

1:Au 1U'  
6:Au 30U'

W:WHITE  
B:BLACK  
1:PBT  
2:PA6T  
3:PA9T  
4:LCP

Bill of materials:

3	HOUSING	PBT	1	UL94V-0	X. ±0.35	X.' ±2*	UNITS	mm	东莞市铀高电子制品有限公司					
2	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X' ±1*	MAT'L	SEE NOTE					TITLE:	PART NO.:
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	FINISH	SEE NOTE	DR:	MINI USB BM 5P 一体式单脚			MUBM-05*N-1BP60	
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY	CHKD:	DWG NO.:			AII-P60	
								APPD:	SCALE			SHEET	REV.	CUSTOMER DRAWING
									1:1			1/1	B	