

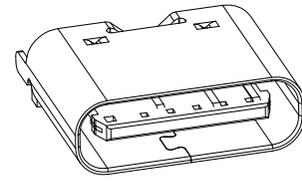
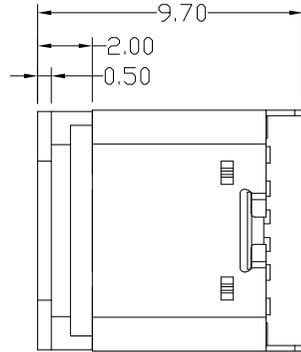





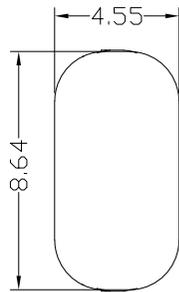


RoHS  
Compliant  
2002/95/EC


REV.	ECN.	NO.	APPD.

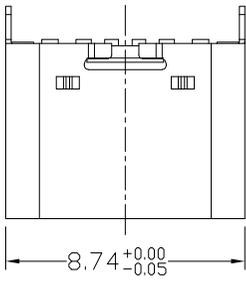

加胶帽示意图

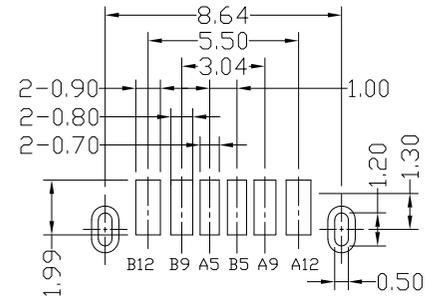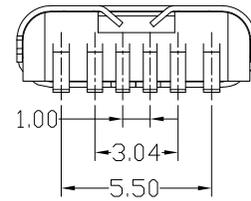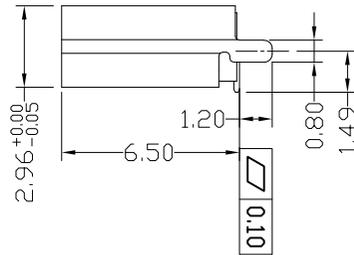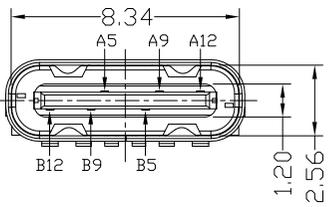

RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

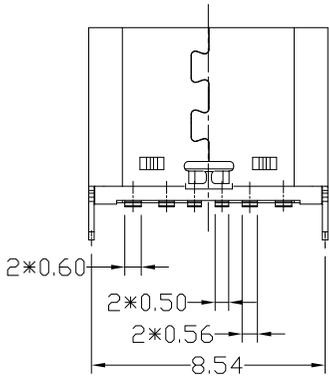

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME



1. ELECTRICAL:  
 1) CURRENT RATING: 3A MAX.  
 2) INSULATION RESISTANCE: 100MΩ MIN;  
 3) CONTACT RESISTANCE: 40mΩ MAX;  
 4) WITHSTANDING VOLTAGE: 100V AC  
 5) OPERATING TEMPERATURE: -30°C TO +85°C.
2. Mechanical:  
 1) Mating Force: 5N~20N  
 2) Unmating Force: 8N~20N  
 3) Durability: 10,000 cycles
3. DIMENSIONS MARKED "▼"  
 TO BE CHECKED BY Q.C & IPQC.

4. PART NO.  
 USCF-06\*N-4BQS22

1Au 1U'  
 2Au 3U'  
 5Au 15U'  
 6Au 30U'

1PBT  
 2PA6T  
 3PA9T  
 4LCP

5	COVER	LCP+30%GF	1	UL94V-0	.X ±0.30	.X' ±2'	UNITS mm
4	SHIELDING PLATE	STAINLESS STEEL	1		.XX ±0.20	.XX' ±1'	MAT'L
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XXX ±0.10	.XXX' ±0.5'	SEE NOTE
2	CONTACT	COPPER ALLOY	6	PLATED GOLD/TIN			SEE NOTE
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY
NO	PARTS	MATERIAL	QTY	FINISHING			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC

**东莞市铀高电子制品有限公司**

TITLE: USB Type-CF 6P 直立式SMT

DR: *Ricky* 2019/08/16

CHKD: *Ricky* 2019/08/16

APPD: \_\_\_\_\_

PART NO.: USCF-06XN-4BQS22

DWG NO.: AII-QS22

SCALE: 1:1

SHEET: 1/1

REV: B

CUSTOMER DRAWING