

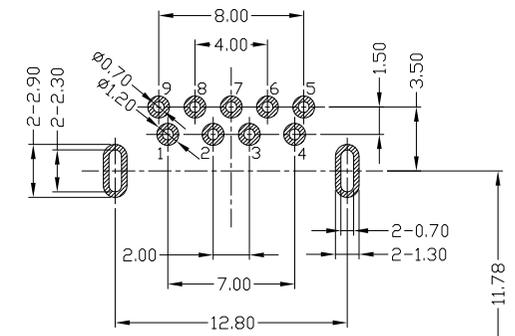
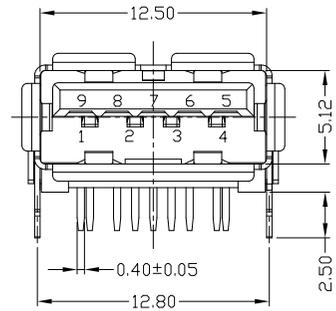


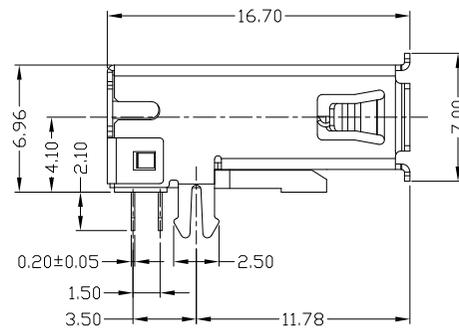


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	STDA_SSRX-
6	STDA_SSRX+
7	GND_DRAIN
8	STDA_SSTX-
9	STDA_SSTX+
Shell	Shield

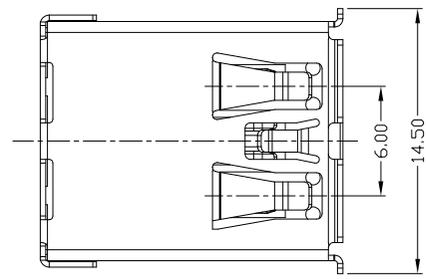

RECOMMENDED PCB LAYOUT

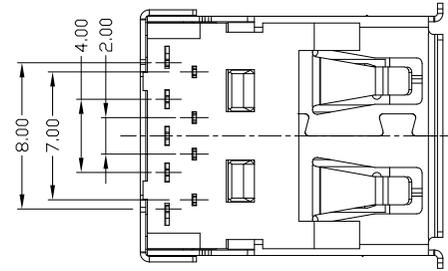

- NOTES:
1. ELECTRICAL:
- CURRENT RATING: 1.5AMP;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE: -40°C ~ +85°C.
2. Mechanical:
- Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-09*N-4BLRC111

1Au 1U"
5Au 15U"
6Au 30U"

1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X.	X.* ±2'	UNITS	mm	MATERIAL	SEE NOTE	FINISH	SEE NOTE	Q'TY	TITLE	PART NO.:	DR:	DWG NO.:	SCALE	SHEET	REV.	CUSTOMER DRAWING								
					.XX	.XX'																SEE NOTE	SEE NOTE	DR:	SCALE	SHEET	REV.	CUSTOMER DRAWING	
3	SHELL	COPPER ALLOY / STAINLESS STEEL	1	PLATED NICKEL	.X ±0.35	.X' ±2'								东莞市铀高电子制品有限公司	USAF-09*N-4BLRC111	gan 2016/12/1	AII-RC111	1:1	1/1	B									
2	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	.XX ±0.25	.XX'																							
1	HOUSING	LCP+30%GF	1	UL94V-0	.XXX ±0.15	.XXX'																							
Bill of materials:					<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.</p>								<p>USB 3.0 AF 板上90度 DIP 长鱼叉卷边 端子脚长2.1</p>																