

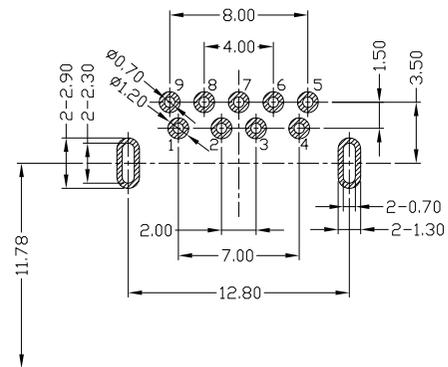
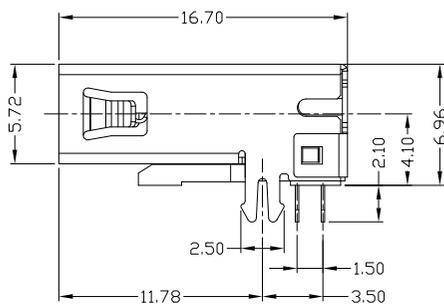
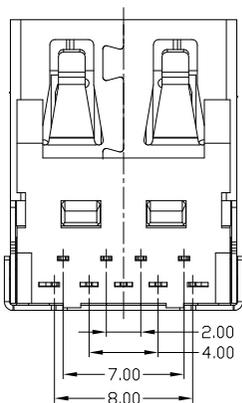


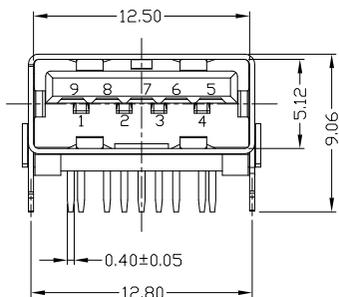

RoHS
Compliant
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
| | | | |
| | | | |
| | | | |

| PIN NUMBER | SIGNAL NAME |
|------------|-------------|
| 1 | VBUS |
| 2 | D- |
| 3 | D+ |
| 4 | GND |
| 5 | STDA_SSRX- |
| 6 | STDA_SSRX+ |
| 7 | GND_DRAIN |
| 8 | STDA_SSTX- |
| 9 | STDA_SSTX+ |
| Shell | Shield |

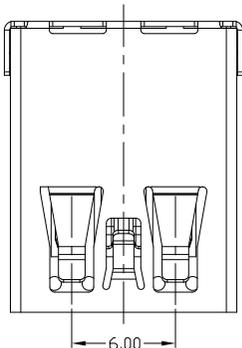

RECOMMENDED PCB LAYOUT



- NOTES:
- ELECTRICAL:
- CURRENT RATING: 1.5 AMP;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE: -40°C ~ +85°C.
- Mechanical:
- Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-09*N-4BLRC114

1Au 10"
5Au 15U"
6Au 30U"

W: WHITE
B: BLACK
BL: BLUE

1PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

| NO | PARTS | MATERIAL | QTY | FINISHING | X. ±0.35 | X.' ±2' | UNITS | 东莞市铀高电子制品有限公司 | | | | |
|---|----------|--------------|-----|-----------------|------------|---------|---|--|--|--|--|----------|
| 3 | SHELL | COPPER ALLOY | 1 | PLATED NICKEL | .X ±0.3 | .X' ±1' | mm | TITLE: USB 3.0 AF 90度 DIP 无卷边 鱼叉脚 脚长2.1 PART NO.: USAF-09*N-4BLRC114 DWG NO.: AII-RC114 DR: gan 2016/12/1 CHKD: gan 2016/12/1 APPD: | | | | |
| 2 | TERMINAL | COPPER ALLOY | 9 | PLATED GOLD/TIN | .XX ±0.25 | .XX' | MAT'L | | | | | SEE NOTE |
| 1 | HOUSING | LCP+30%GF | 1 | UL94V-0 | .XXX ±0.15 | .XXX' | FINISH | | | | | SEE NOTE |
| | | | | | | | Q'TY | | | | | |
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC. | | | | | | | SCALE: 1:1 SHEET: 1/1 REV: B CUSTOMER DRAWING | | | | | |