

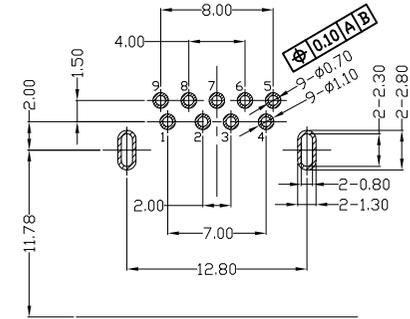




RoHS  
Compliant  
2002/95/EC





Halogen Free

REV.	ECN.	NO.	APPD.



CONN FRONT EDGE

RECOMMENDED P.C.B LAYOUT(±0.05)

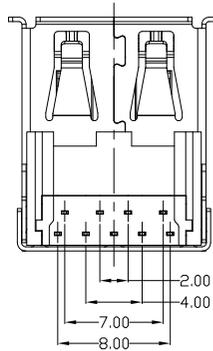

NOTES:

1. ELECTRICAL:

- VOLTAGE CURRENT RATING: 1.5AMP, 30V AC;
- INSULATION RESISTANCE: 1000Ω MIN;
- CONTACT RESISTANCE: 30mΩ MAX;
- WITHSTANDING VOLTAGE: 500V AC;
- OPERATING TEMPERATURE: -55°C TO +105°C.

2. Mechanical:

- Mating Force: 35N MAX
- Unmating Force: 10N MIN.

3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-091N-4BLRS46-H

- W: WHITE
- B: BLACK
- BL: BLUE
- 1: Au 1U"
- 5: Au 15u"
- 6: Au 30U"
- 1: PBT
- 2: PA6T
- 3: PA9T
- 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING				
5	HOUSING	LCP+30%GF HF (Halogen Free)	1	UL94V-0	X. ±0.35	X.' ±2'	UNITS	mm
4	COVER	LCP+30%GF HF (Halogen Free)	1	UL94V-0	.X ±0.3	.X' ±1'	MAT'L	
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'	SEE NOTE	
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	FINISH	
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN			SEE NOTE	
							Q'TY	

东莞市铀高电子制品有限公司

TITLE:  
USB 3.0 AF 90度 DIP 脚距12.80 卷  
边 蓝胶 无卤

PART NO.:  
USAF-091N-4BLRS46-H

DR: gan 2018/07/12

DWG NO.:  
AII-RS46-H

CHKD: gan 2018/07/12

APPD:

SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	B	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

