

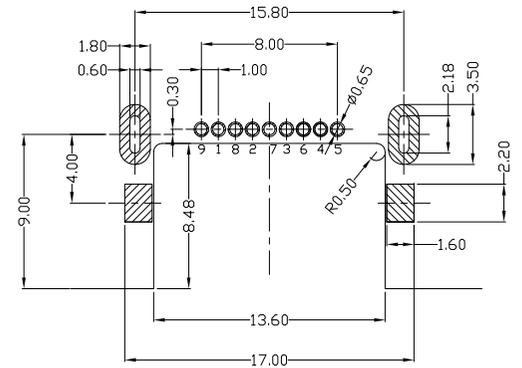
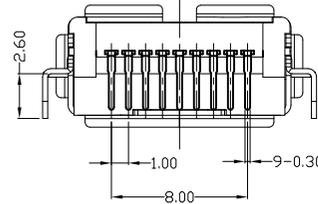
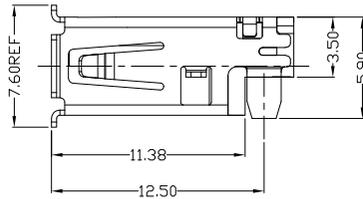


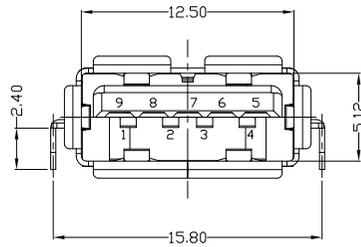


RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

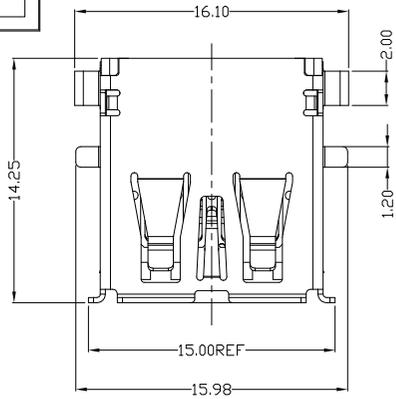

RECOMMENDED PCB LAYOUT(1.0~1.60±0.05)

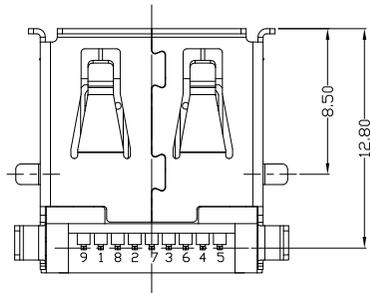

- NOTES:
- 1) ELECTRICAL:
- VOLTAGE CURRENT RATING: 1.5AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -25°C TO +85°C.
- 2) Mechanical:
- Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

- USAF-091N-4BLRS47
- 1: Au 1U'
 - 5: Au 15u'
 - 6: Au 30U'
 - 1: PBT
 - 2: PA6T
 - 3: PA9T
 - 4: LCP

Bill of materials:


NO	PARTS	MATERIAL	QTY	FINISHING
4	HOUSING	LCP+30%GF	1	UL94V-0
3	SHELL	COPPER ALLOY	1	PLATED NICKEL
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN

东莞市铀高电子制品有限公司			
TITLE: USB 3.0 AF 沉板 H3.50 DIP 卷边带 缺口 蓝胶		PART NO.: USAF-091N-4BLRS47	
DR: gan 2018/07/12		DWG NO.: AII-RS47	
CHKD: gan 2018/07/12		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER DRAWING
		B	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC



Q'TY



FINISH

MAT'L

UNITS

X. ±0.35 X.' ±2'

.X ±0.3 .X' ±1'

.XX ±0.25 .XX'

.XXX ±0.15 .XXX'