

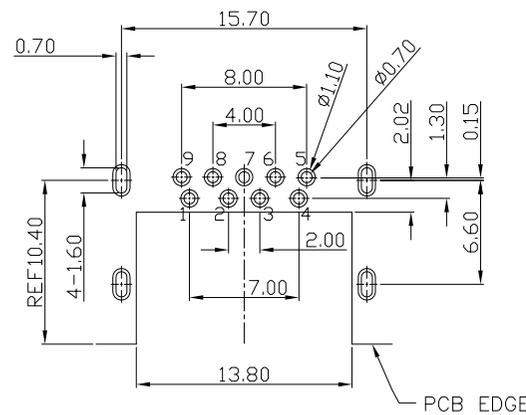
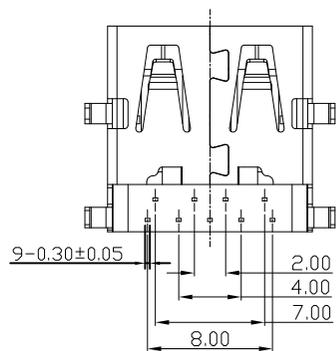



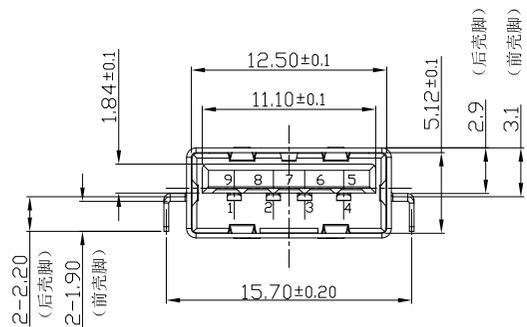


RoHS Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

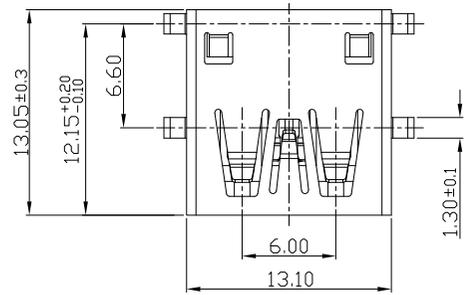

TOLERANCE: ±0.05, THICKNESS: 1.2 mm
RECOMMENDED PCB LAYOUT

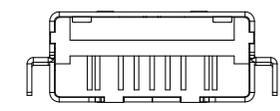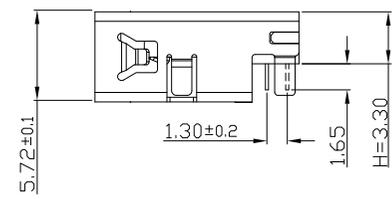

Pin #	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield



- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.5AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -40°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - Durability: 5,000 cycles
 - DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
USAF-09*N-4BLRS18

1: Au 10*
5: Au 15u*
6: Au 30u*

W: WHITE
B: BLACK
BL: BLUE

1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司					
4					X. ±0.35	X.' ±2*	MAT'L	TITLE: USB 3.0 AF 沉板 无卷边 L=13.0mm CL=0.50mm		PART NO.: USAF-09XN-4BLRS18		
3	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.3	.X' ±1*	SEE NOTE	DR:	Ricky 2017/11/8		DWG NO.:	
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	FINISH	CHKD:	Ricky 2017/11/8		AII-RS18	
1	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	SEE NOTE	APPD:	Ricky 2017/11/8		SCALE SHEET REV. CUSTOMER DRAWING	
							Q'TY		1:1	1/1	B	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

