

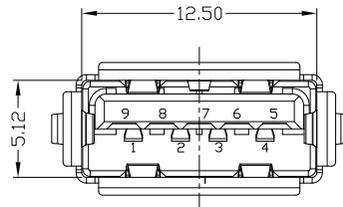
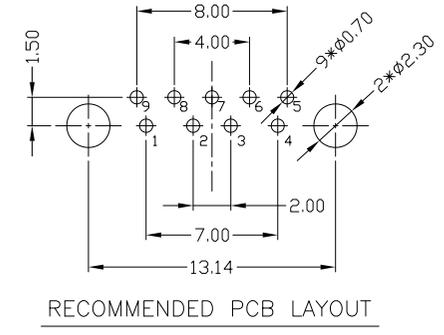
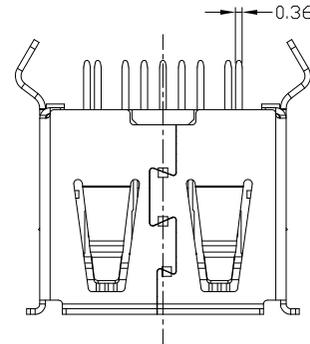
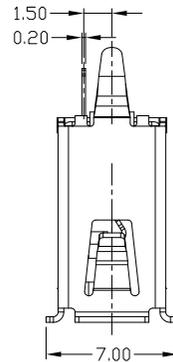
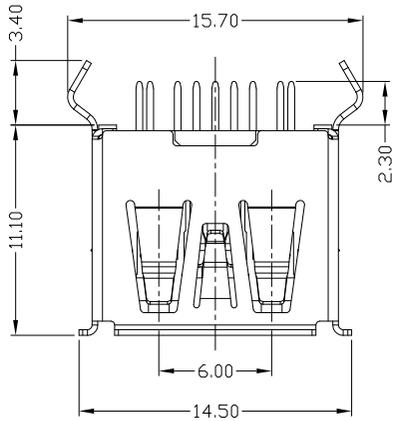


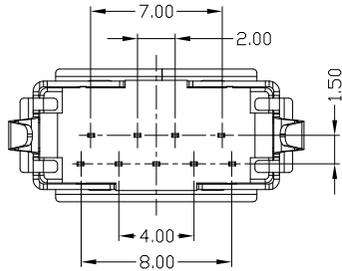

RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	STDA_SSRX-
6	STDA_SSRX+
7	GND_DRAIN
8	STDA_SSTX-
9	STDA_SSTX+
Shell	Shield

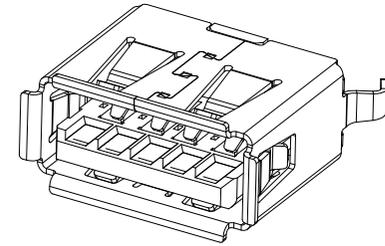

NOTES:

- ELECTRICAL:
  - CURRENT RATING: 1.5 AMP;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 100V AC;
  - OPERATING TEMPERATURE: -20°C ~ +60°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



4. PART NO.

USAF-09\*N-3BLPC11

1Au 1U'  
5Au 15U'  
6Au 30U'

W:WHITE  
B:BLACK  
BL:BLUE  
1PBT  
2PA6T  
3PA9T  
4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X.	X.*	UNITS	东莞市铀高电子制品有限公司				
					±0.35	±2'		mm	TITLE:	PART NO.:	DR:	DWG NO.:
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X	.X'	MAT'L	USB 3.0 AF 180度DIP H=11.1 卷边 USAF-09*N-3BLPC11 DR: gan 2016/12/31 DWG NO.: AII-PC11 CHKD: gan 2016/12/31 APPD:				
2	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	.XX	.XX'	SEE NOTE					
1	HOUSING	PA9T/LCP/PBT	1	UL94V-0	.XXX	.XXX'	FINISH					
NO PARTS MATERIAL QTY FINISHING					.XXX ±0.15	.XXX'	SEE NOTE	Q'TY	SCALE	SHEET	REV.	CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.

