

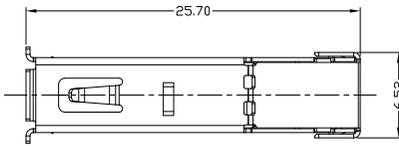








RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND
4	GND	8	SSTX-
Shell	Shield	9	SSRT+

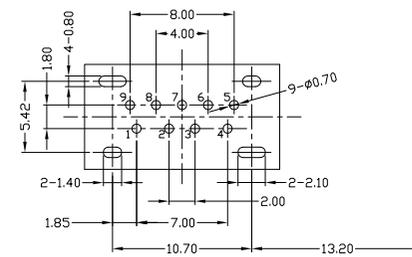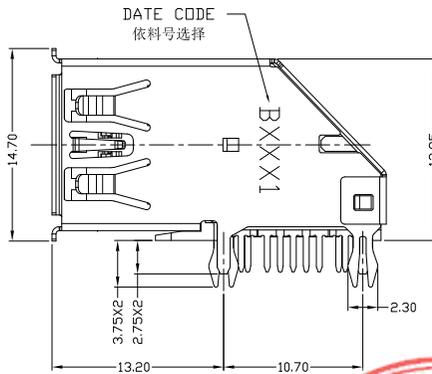

RECOMMENDED PCB LAYOUT

PCB EDGE

NOTES:

1) ELECTRICAL:

- CURRENT RATING: 1.8AMP;
- INSULATION RESISTANCE: 100MΩ MIN;
- CONTACT RESISTANCE: 50mΩ MAX;
- WITHSTANDING VOLTAGE: 100V AC;
- OPERATING TEMPERATURE: -55°C ~ +85°C.

2) Mechanical:

- Mating Force: 35N MAX
- Unmating Force: 10N MIN.

- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-09*N-4BLCC10

1#Au 10"	W:WHITE
5#Au 15U"	B:BLACK
6#Au 30U"	BL:BLUE
	1#PBT
	2#PA6T
	3#PA9T
	4#LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm
4	SHELL	STAINLESS STEEL	1	PLATED NICKEL	X. ±0.35	X.' ±2'
3	TERMINAL2	COPPER ALLOY	5	PLATED GOLD/TIN	.X ±0.3	.X' ±1'
2	TERMINAL1	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX'
1	HOUSING	LCP/PBT+30%GF	1	UL94V-0	.XXX ±0.15	.XXX'

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.

<p>东莞市铀高电子制品有限公司</p>				<p>TITLE: USB 3.0 AF 90度 侧插式 外壳卷边 小鱼叉脚</p>		<p>PART NO.: USAF-09*N-4BLCC10</p>	
				<p>DR: gan 2016/08/30</p>		<p>DWG NO.: AII-CC10</p>	
<p>Q'TY</p>		<p>CHKD: gan 2016/08/30</p>		SCALE	SHEET	REV.	CUSTOMER
		<p>APPD:</p>		1:1	1/1	B	DRAWING

