

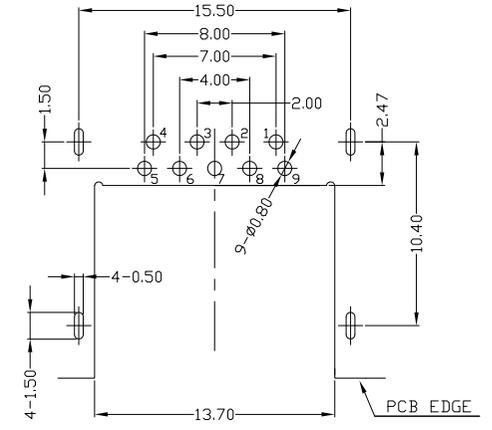
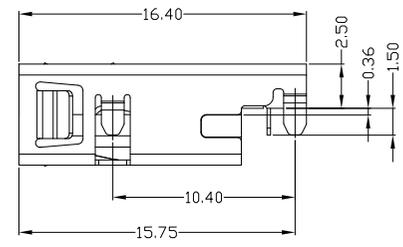
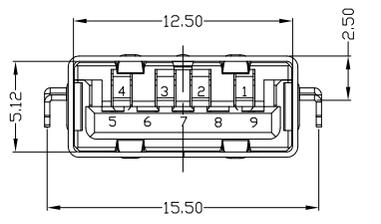
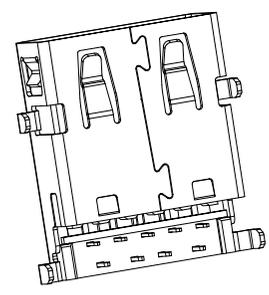


REV	LTR	DESCRIPTION	DATE	REVISER	APPD

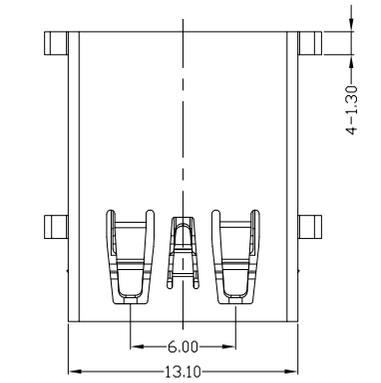


RECOMMENDED PCB LAYOUT

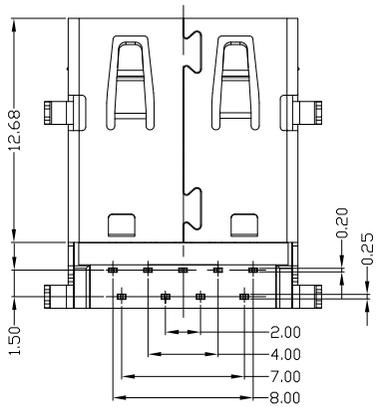

NOTES:
 1. ELECTRICAL:
 1) VOLTAGE CURRENT RATING: 1.5AMP, 30V AC;
 2) INSULATION RESISTANCE: 100MΩ MIN;
 3) CONTACT RESISTANCE: 50mΩ MAX;
 4) WITHSTANDING VOLTAGE: 100V AC;
 5) OPERATING TEMPERATURE: -40°C TO +85°C.
 2. Mechanical:
 1) Mating Force: 35N MAX
 2) Unmating Force: 10N MIN.
 3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司					
4	HOUSING	LCP+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	MAT'L	TITLE: USB 3.0 AF DIP 90度 H2.5 无卷边 反向		PART NO.: USAF-09*N-4BRS14		
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X' ±1'	SEE NOTE	DR: gan 2014/9/19		DWG NO.: AII-RS14		
2	TERMINAL1	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX'	FINISH	CHKD: gan 2014/9/19		SCALE SHEET REV. CUSTOMER DRAWING		
1	TERMINAL2	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	SEE NOTE	APPD:		1:1 1/1 B		
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC		Q'TY					