





RoHS
Compliant
2002/95/EC





REV.	ECN.	NO.	APPD.

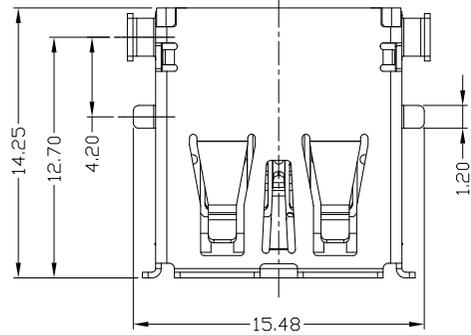

Pin #	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	STDA_SSRX-
6	STDA_SSRX+
7	GND_DRAIN
8	STDA_SSTX-
9	STDA_SSTX+
Shell	Shield

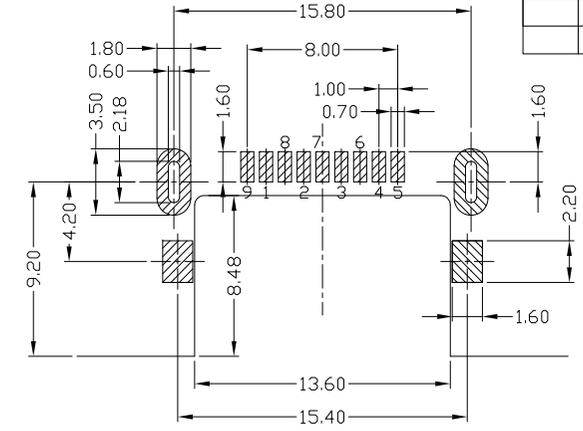

RECOMMENDED PCB LAYOUT

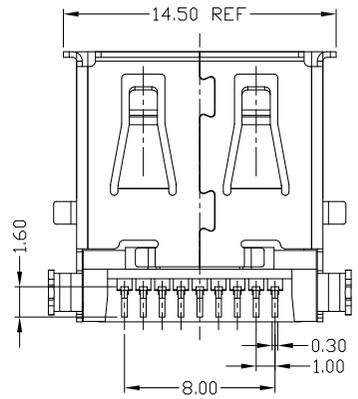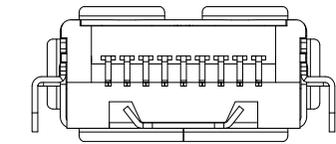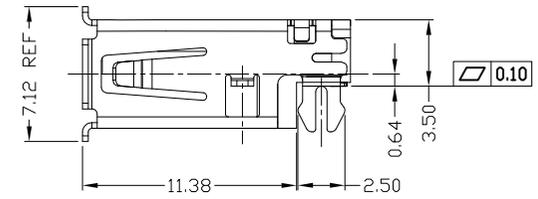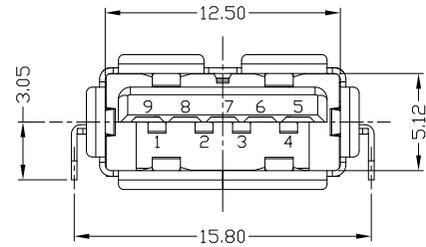

NOTES:

- ELECTRICAL:
 - CURRENT RATING: 1.5AMP;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE: -25°C ~ +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



4. PART NO.

USAF-09*N-4BLVC10
 1:Au 1U*
 5:Au 15U*
 6:Au 30U*
 1:PBT
 2:PA6T
 3:PA9T
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X.	X.*	UNITS	东莞市铀高电子制品有限公司			
					±0.35	±2*					
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X* ±1*	MAT'L	TITLE: USB 3.0 AF沉板 SMT 卷边鱼叉脚 PART NO.: USAF-09*N-4BLVC10 DR: gan 2016/12/1 DWG NO.: AII-VC10 CHKD: gan 2016/12/1 APPD:			
2	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	.XX ±0.25	.XX*	SEE NOTE				
1	HOUSING	LCP+30%GF	1	UL94V-0	.XXX ±0.15	.XXX*	FINISH				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.					Q'TY	SCALE	SHEET	REV.	CUSTOMER DRAWING		
					1:1	1/1	B				