

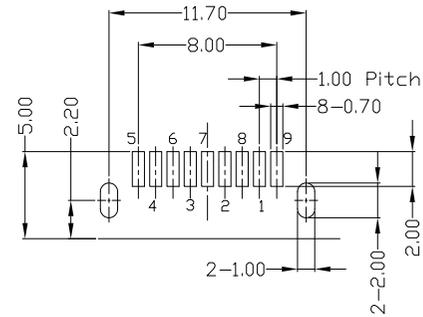



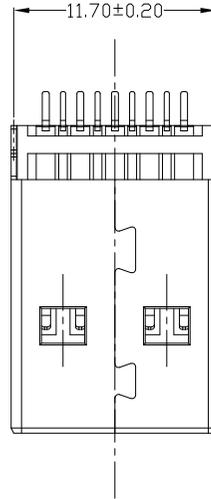


RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

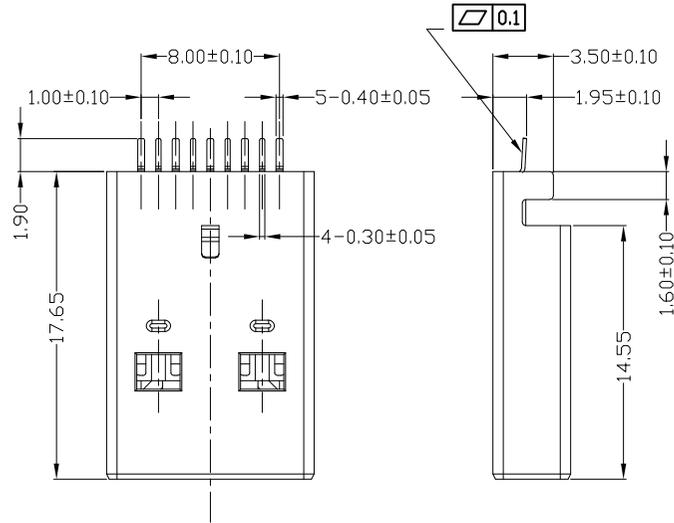

RECOMMEND PCB LAYOUT(TOLERANCE:±0.05)



- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.5AMP, 30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
USAM-09*N-4BLVU34
- 1:Au 1U*
 - 5:Au 15U*
 - 6:Au 30U*
 - ▼:WHITE
 - :BLACK
 - :BLUE
 - 1:PBT
 - 2:PA6T
 - 3:PA9T
 - 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司					
3	HOUSING	LCP+30%GF	1	PLATED NICKEL	X. ±0.35	X.' ±2'	MAT'L	TITLE: USB AM 3.0 L=17.6MM 沉板1.9MM 无柱(外壳脚长3.50MM)锡脚1.9				
2	SHELL	SPCC	1	UL94V-0	.X ±0.3	.X' ±1'						SEE NOTE
1	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	.XX ±0.25	.XX'	FINISH	DR: Ricky 2019/2/15				
					.XXX ±0.15	.XXX'	SEE NOTE	CHKD: Ricky 2019/2/15				
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC		Q'TY	APPD: Ricky 2019/2/15				
								SCALE	SHEET	REV.	CUSTOMER DRAWING	
								1:1	1/1	B		