

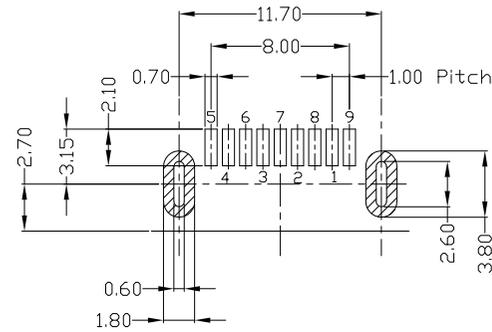
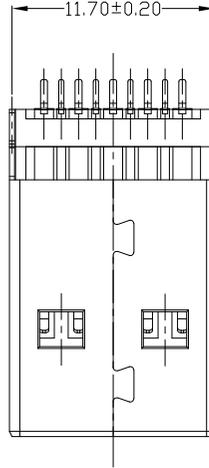



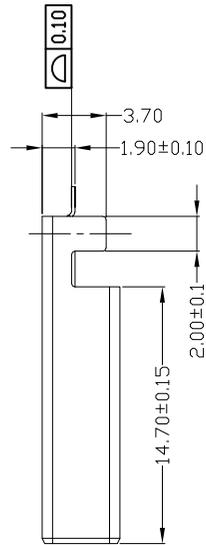


RoHS Compliant  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

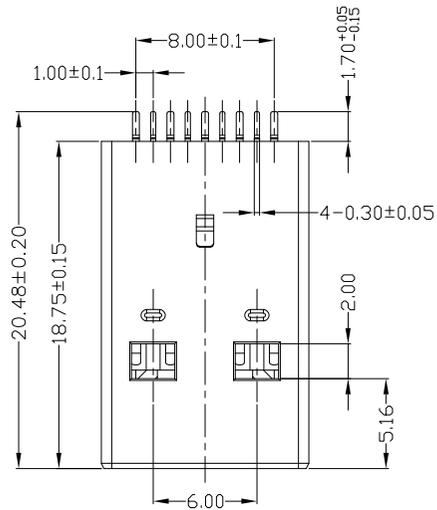

RECOMMENDED P.C.B LAYOUT

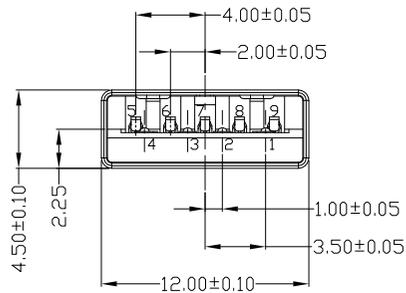

NOTES:

1. ELECTRICAL:  
 1) VOLTAGE CURRENT RATING: 1.5AMP, 30V AC;  
 2) INSULATION RESISTANCE: 100MΩ MIN;  
 3) CONTACT RESISTANCE: 30mΩ MAX;  
 4) WITHSTANDING VOLTAGE: 500V AC;  
 5) OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:  
 1) Mating Force: 35N MAX  
 2) Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼"  
 TO BE CHECKED BY Q.C & IPQC.

4. PART NO.  
 USAM-09\*N-4BLVU30
- 1:Au 1U\*  
 5:Au 15U\*  
 6:Au 30U\*
- 1:V-WHITE  
 2:BLACK  
 3:BL-BLUE  
 4:CP  
 1:PB  
 2:PA6T  
 3:PA9T  
 4:PC

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司					
3	HOUSING	LCP+30%GF	1	PLATED NICKEL	X. ±0.35	X.' ±2'	SEE NOTE	TITLE: USB AM 3.0 L=18.7MM 沉板1.9MM 无柱(外壳脚长3.70MM)锡脚1.7		PART NO.:		
2	SHELL	SPCC	1	UL94V-0	.X ±0.3	.X' ±1'		FINISH	USAM-09XN-4BLVU30		PARI NO.:	
1	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	.XX ±0.25	.XX'		SEE NOTE	DR: Ricky 2019/2/18		DWG NO.:	
					.XXX ±0.15	.XXX'	Q'TY	CHKD: Ricky 2019/2/18		AII-VU30		
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC		APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
									1:1	1/1	B	