

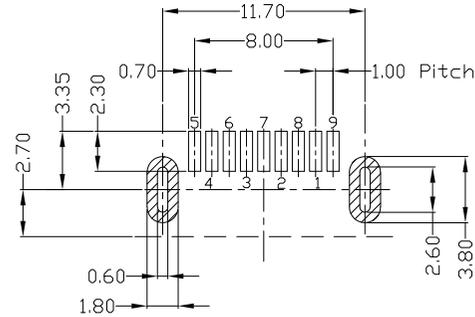
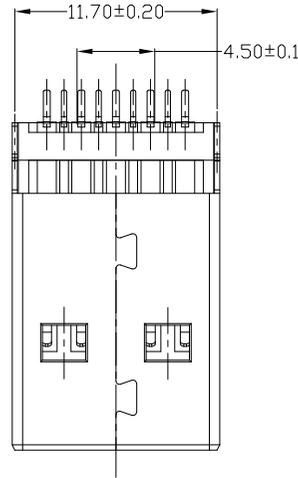



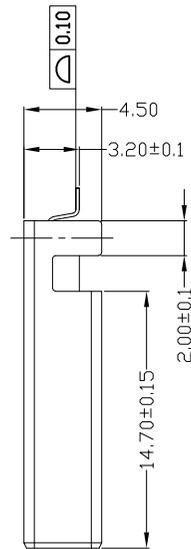


RoHS  
Compliant  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

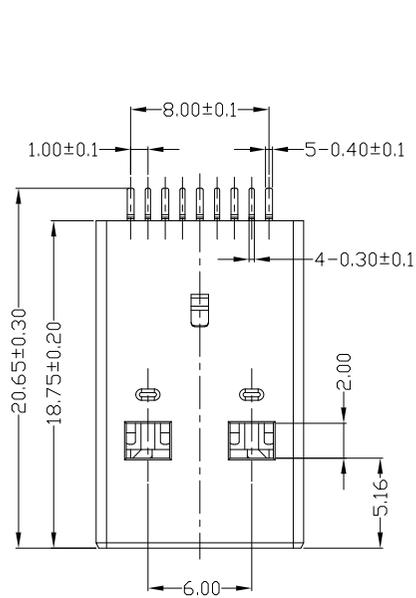

RECOMMENDED P.C.B. LAYOUT

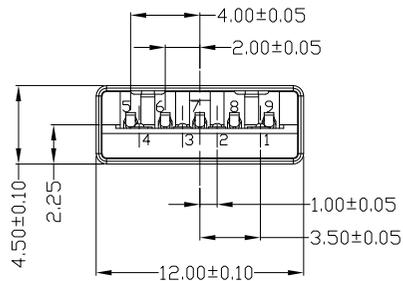

- NOTES:
- ELECTRICAL:
    - VOLTAGE CURRENT RATING: 1.5AMP, 30V AC;
    - INSULATION RESISTANCE: 100MΩ MIN;
    - CONTACT RESISTANCE: 30mΩ MAX;
    - WITHSTANDING VOLTAGE: 500V AC;
    - OPERATING TEMPERATURE: -55°C TO +85°C.
  - Mechanical:
    - Mating Force: 35N MAX
    - Unmating Force: 10N MIN.
  - DIMENSIONS MARKED "▼"  
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.  
USAM-09\*N-4BLVU38
- 1:AU 1U\*  
5:AU 15U\*  
6:AU 30U\*
- 1:V:WHITE  
2:BLACK  
3:BL:BLUE  
4:LC

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司				
3	HOUSING	LCP+30%GF	1	PLATED NICKEL	X. ±0.35	X.' ±2'	MAT'L	TITLE: USB AM 3.0 L=18.7MM 沉板3.2MM 无柱(外壳脚长4.50MM) 锡脚1.9 PARTI NO.: USAM-09XN-4BLVU38 DR: Ricky 2019/2/18 DWG NO.: AII-VU38 CHKD: Ricky 2019/2/18 APPD:			
2	SHELL	SPCC	1	UL94V-0	.X ±0.3	.X' ±1'	SEE NOTE				
1	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	.XX ±0.25	.XX'	FINISH				
					.XXX ±0.15	.XXX'	SEE NOTE				
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC		Q'TY	SCALE	SHEET	REV.	CUSTOMER DRAWING
								1:1	1/1	B	