

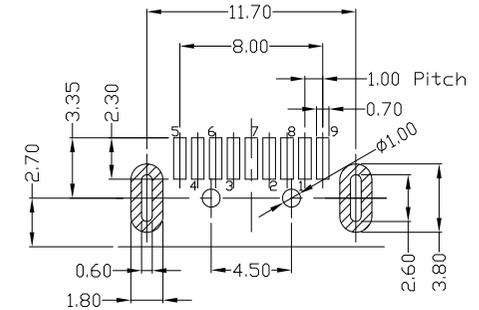
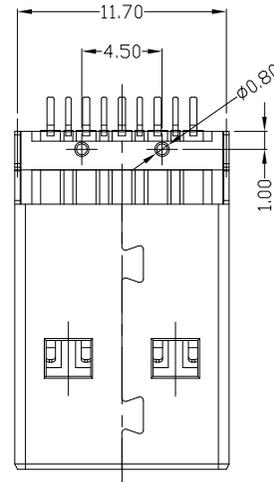



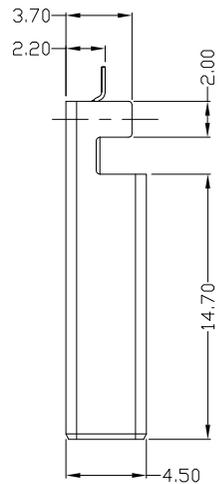


RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

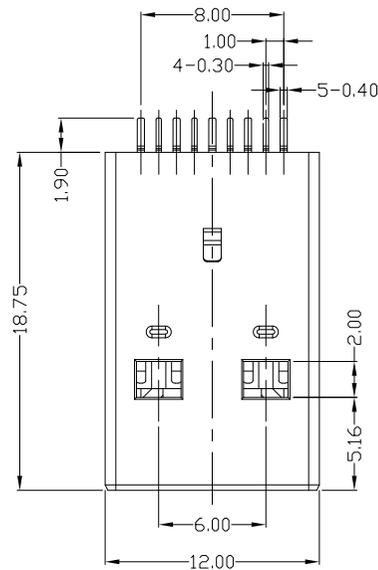

RECOMMEND PCB LAYOUT
(TOLERANCE:±0.05)

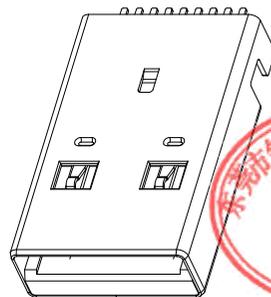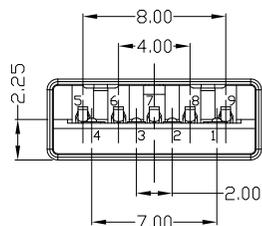

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING:1.5 AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-40°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAM-09*N-4BLVW09

1:Au 1U*
5:Au 15U*
6:Au 30U*

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.' ±2*	UNITS	东莞市铀高电子制品有限公司			
					.X ±0.3	.X' ±1*	mm				
3	HOUSING	LCP+30%GF	1	UL94V-0	.XX ±0.25	.XX*	MAT'L	TITLE: USB AM 3.0 L=18.7 沉板2.2 外壳脚长 3.7 有柱			
2	SHELL	SPCC	1	PLATED NICKEL	.XXX ±0.15	.XXX*	SEE NOTE		PART NO.: USAM-09*N-4BLVW09		
1	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.		FINISH	DR: gan 2017/9/1			
							Q'TY	CHKD: gan 2017/9/1	DWG NO.: AII-VW09		
							APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
							1:1	1/1	B		