

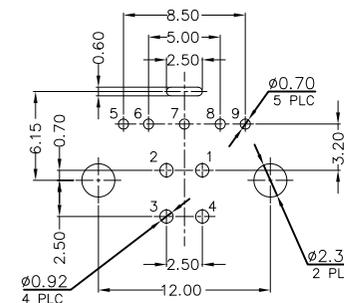
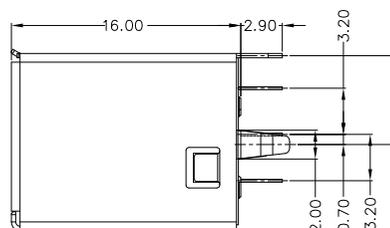
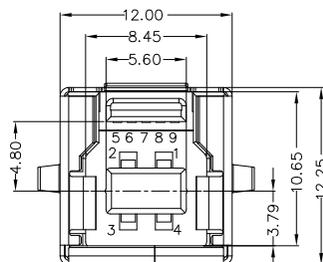


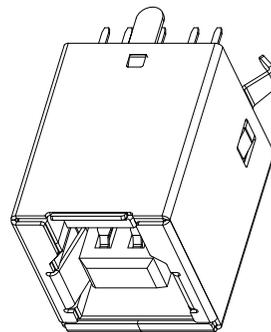


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

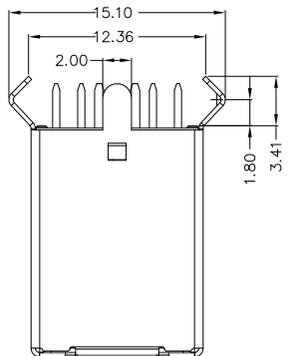

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdB_SSTX-
6	StdB_SSTX+
7	GND_DRAIN
8	StdB_SSRX-
9	StdB_SSRX+
Shell	Shield

RECOMMEND P.C.B LAYOUT COMPONENT SIDE
DEFAUET TOLERANCES: ±0.05 (PCB T=1.6mm)

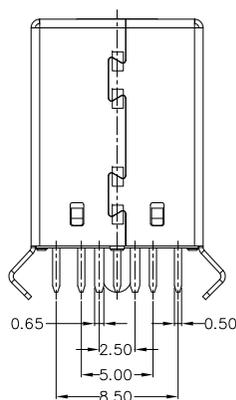

- NOTES:
1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 1.8AMP,30V AC;
 - 2) INSULATION RESISTANCE: 100MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 100V AC;
 - 5) OPERATING TEMPERATURE:-55°C TO +85°C.
 2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
 3. NOTE:1.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USBF-09*N-4BLPU30

1:Au 1U*
5:Au 15u*
6:Au 30U*
W:WHITE
B:BLACK
BL:BLUE
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X	X'	UNITS
5	COVER	LCP+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	mm
4	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.3	.X' ±1'	MAT'L
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'	SEE NOTE
2	SPRING CONTACT(4P)	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	FINISH
1	FLAT CONTACT(5P)	COPPER ALLOY	5	PLATED GOLD/TIN			SEE NOTE
							Q'TY

东莞市铀高电子制品有限公司

TITLE: USB 3.0 BF DIP 180度 PART NO.: USBF-09XN-4BLPU30

DR: Ricky 2018/11/20 DWG NO.: AII-PU30

CHKD: Ricky 2018/11/20

APPD:

SCALE: 1:1 SHEET: 1/1 REV.: B CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC