



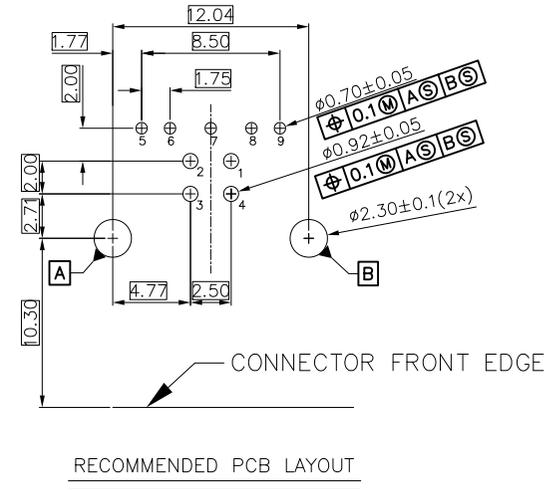

RoHS Compliant
2002/95/EC

PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	STDA_SSTX-
6	STDA_SSTX+
7	GND_DRAIN
8	STDA_SSRX-
9	STDA_SSRX+
Shell	Shield

REV.	ECN.	NO.	APPD.

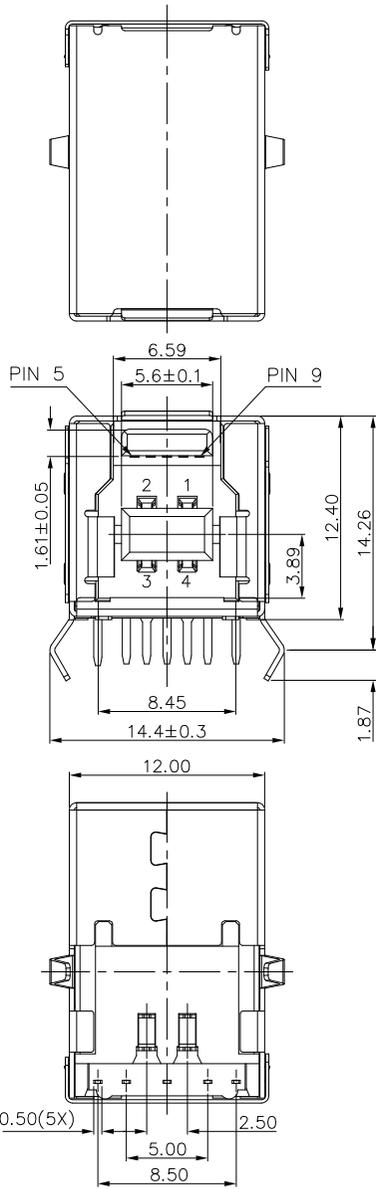

NOTES:

- ELECTRICAL:
 - CURRENT RATING: 1.5AMP.
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE: -40°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
USBF-09*N-4BLRC14

W: WHITE
B: BLACK
BL: BLUE

1: Au 1U"
5: Au 15U"
6: Au 30U"

1: PBT
2: PA6T
3: PA9T
4: LCP



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm
5	HOUSING	LCP+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'
4	BACK COVER	COPPER ALLOY/SPCC	1	PLATED NICKEL	.X ±0.3	.X' ±1'
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN		

东莞市铀高电子制品有限公司			
TITLE:	USB3.0 BF 90° DIP 弯脚 H12.4	PART NO.:	USBF-09XN-4BLRC14
DR:	Ricky 2019/02/15	DWG NO.:	Ali-RC14
CHKD:	Ricky 2019/02/15	SCALE	1:1
APPD:		SHEET	1/1
		REV.	B
		CUSTOMER DRAWING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

