


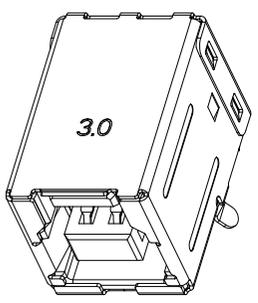
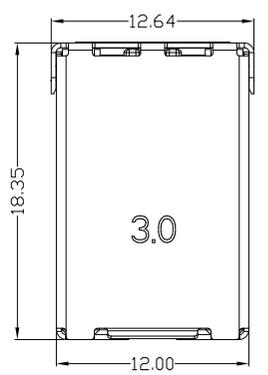
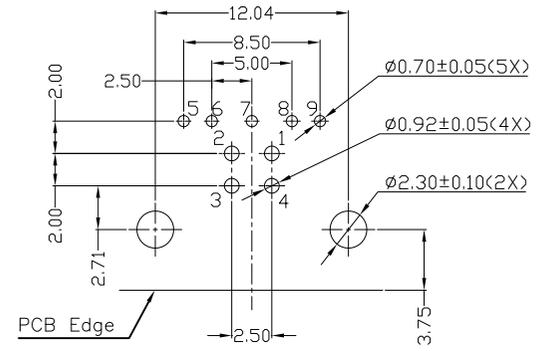


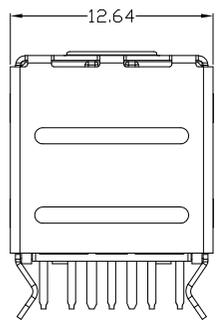

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

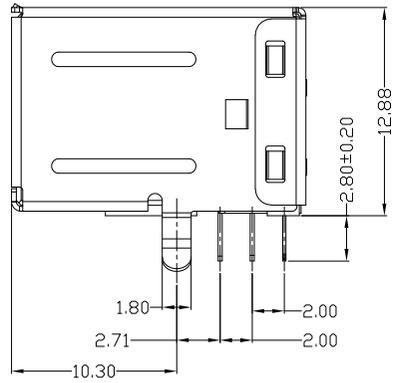

3D VIEW

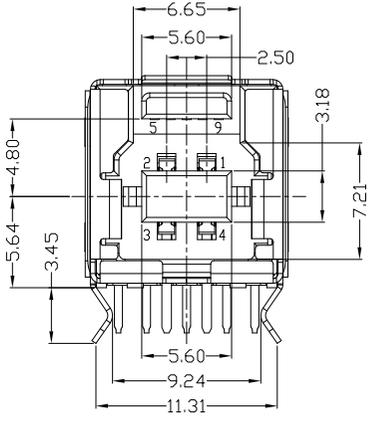

RECOMMENDED PCB LAYOUT(T=1.00~1.60mm)
COMPONENT SIDE

A

B

C

D



- NOTES:
1. ELECTRICAL:
 - 1) CURRENT RATING: 15AMP.
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -40°C TO +85°C.
 2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
 3. DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
USBF-09*N-4BLRU35
- 1: Au 1U"
 - 5: Au 15U"
 - 6: Au 30U"
 - W: WHITE
 - B: BLACK
 - BL: BLUE
 - 1: PBT
 - 2: PA6T
 - 3: PA9T
 - 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING				
4	HOUSING	LCP+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	UNITS	mm
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X' ±1'	MAT'L	
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX'	SEE NOTE	
1	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	FINISH	
							SEE NOTE	
							Q'TY	

东莞市铀高电子制品有限公司

TITLE: USB3.0 BF 90° DIP
内弯脚 H12.9

PART NO.: USBF-09XN-4BLRU35

DR: Ricky 2019/2/15

DWG NO.: AII-RU35

CHKD: Ricky 2019/2/15

APPD:

SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	B	

E

1

2

3

4

5

6

7