




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

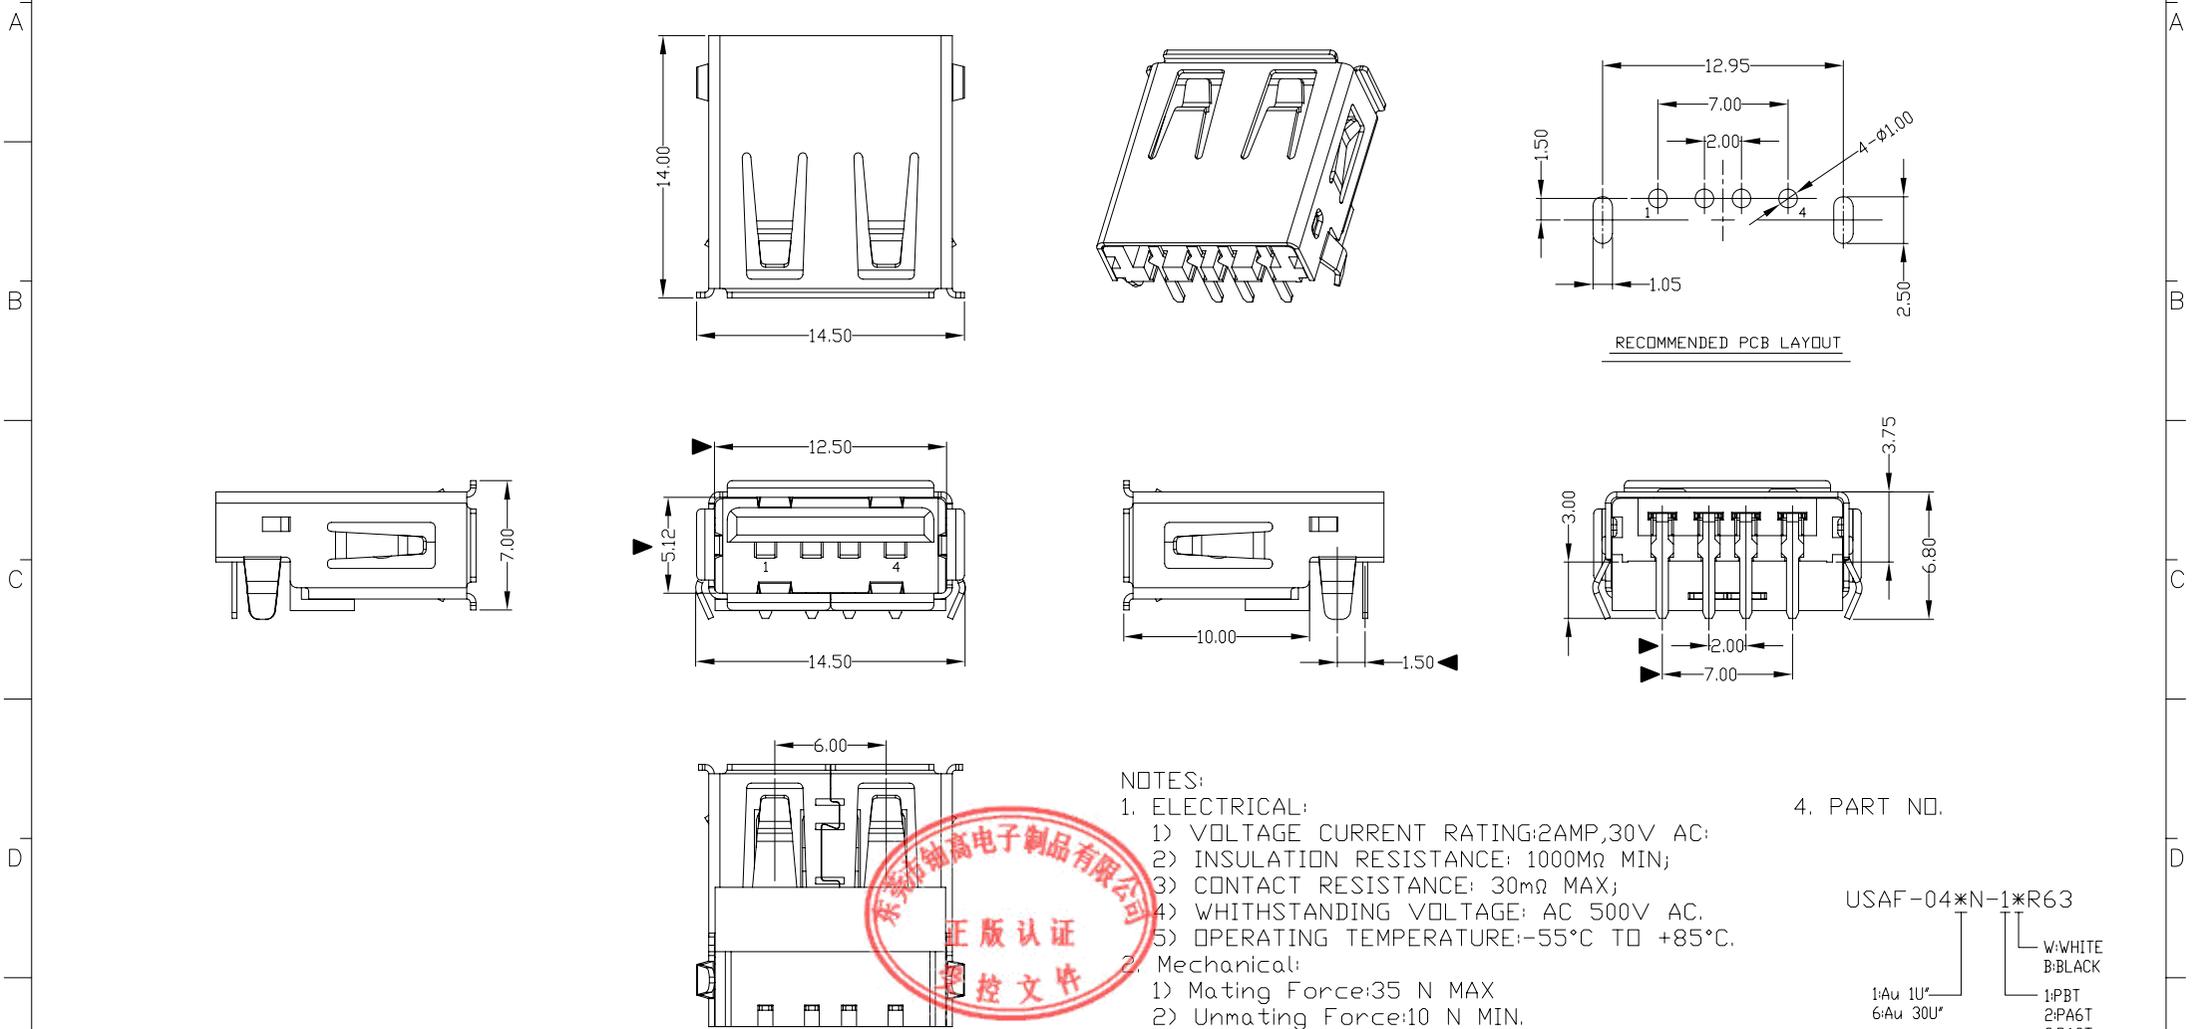

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WHITHSTANDING VOLTAGE: AC 500V AC.
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35 N MAX
 - Unmating Force: 10 N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*R63

1: Au 1U*
6: Au 30U*

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X.	.X	.XX	.XXX
3	HOUSING	PBT	1	UL94V-0	X. ±0.35	.X ±0.3	.XX ±0.25	.XXX ±0.15
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	X.* ±2*	.X* ±1*	.XX*	.XXX*
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN				

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

东 莞 市 铀 高 电 子 制 品 有 限 公 司

TITLE: USB AF 90° 沉板4E短脚

PART NO.: USAF-04*N-1*R63

DR: gan 2012/6/29

DWG NO.: AII-R63

CHKD: gan 2012/6/29

SCALE: 1:1

SHEET: 1/1

REV: B

APPD:

CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

