




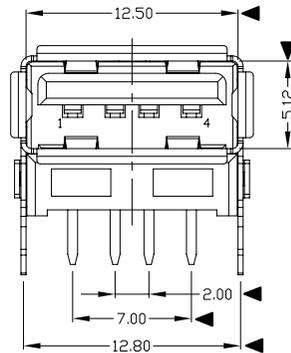

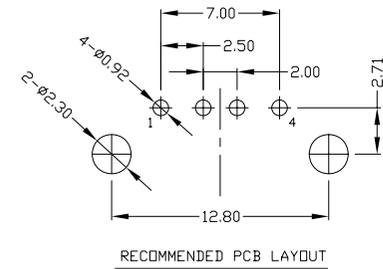




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



NOTES:

1. ELECTRICAL:
 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 2) INSULATION RESISTANCE: 1000MΩ MIN;
 3) CONTACT RESISTANCE: 30mΩ MAX;
 4) WITHSTANDING VOLTAGE: 500V AC;
 5) OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:
 1) Mating Force: 35N MAX
 2) Unmating Force: 10N MIN.
3. NOTE: 1. DIMENSIONS MARKED "▼"
 TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*R67

- 1: Au 1U"
 6: Au 30U"
- 1: W: WHITE
 B: BLACK
- 1: PBT
 2: PA6T
 3: PA9T
 4: LCP

Bill of materials:

3	HOUSING	PBT+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	UNITS	东莞市铀高电子制品有限公司 TITLE: USB A/F 90° DIP 加高型 PART NO.: USAF-04*N-1*R67 DR: Ricky 2014/04/10 DWG NO.: AII-R67 CHKD: Ricky 2014/04/10 APPD:
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X' ±1'	mm	
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX'	MAT'L	
NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX'	SEE NOTE	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.								SCALE: 1:1 SHEET: 1/1 REV.: B CUSTOMER DRAWING