

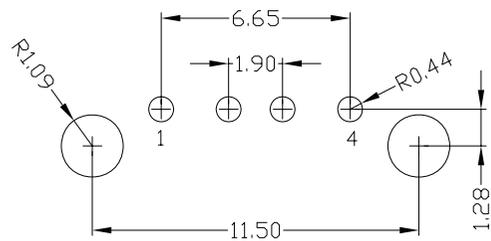
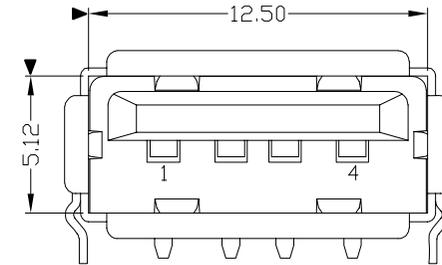


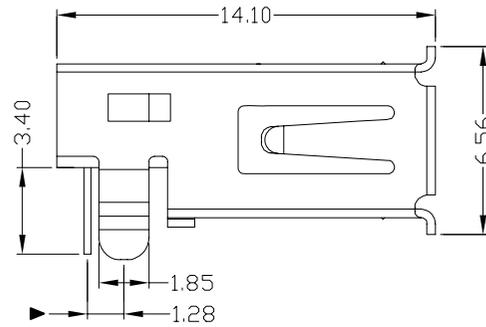


RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

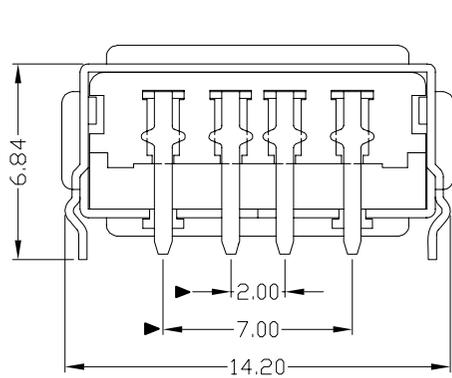

RECOMMENDED PCB LAYOUT

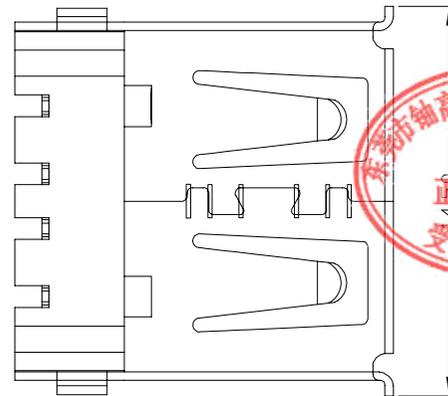

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 50mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 300V AC;
- 5) OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

1. Mating Force: 35N MAX
Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
4. PART NO.

USAF-04*N-1*R84

1: Au 1U*
6: Au 30U*
W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司				
3	HOUSING	PBT	1	UL94V-0	X. ±0.35	X.* ±2*	SEE NOTE	TITLE: USB A/F 90° DIP 沉板(3E)		PART NO.: USAF-04*N-1*R84	
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.3	.X* ±1*					
1	TERMINAL	COPPER ALLOY	4	PALTED GOLD/TIN	.XXX ±0.15	.XXX*					
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.						
							APPD: gan 2012/07/03	SCALE: 1:1	SHEET: 1/1	REV: B	CUSTOMER DRAWING