

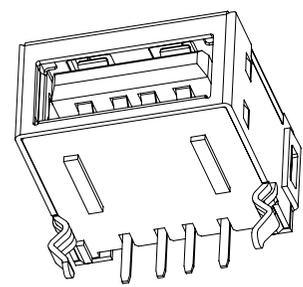






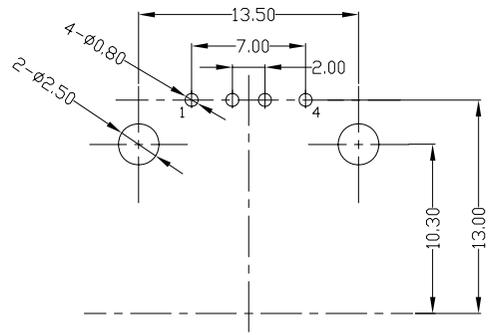


RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

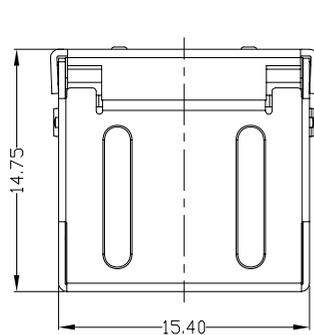

RECOMMENDED PCB LAYOUT

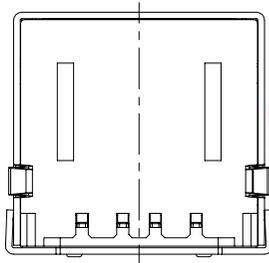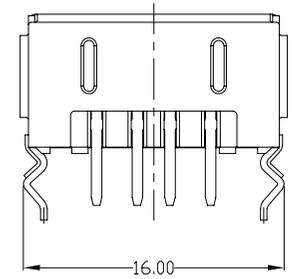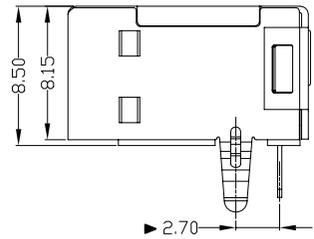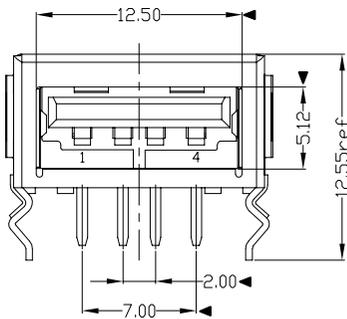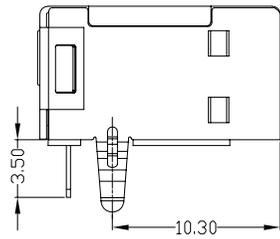

NOTES:  
 1. ELECTRICAL:  
 1) VOLTAGE CURRENT RATING: 2AMP,30V AC;  
 2) INSULATION RESISTANCE: 1000MΩ MIN;  
 3) CONTACT RESISTANCE: 30mΩ MAX;  
 4) WITHSTANDING VOLTAGE: 500V AC;  
 5) OPERATING TEMPERATURE: -55°C TO +85°C.  
 2. Mechanical:  
 1) Mating Force: 35N MAX  
 2) Unmating Force: 10N MIN.  
 3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.  
 USAF-04\*N-1\*R605  
 W:WHITE  
 B:BLACK  
 1:Au 1U"  
 6:Au 30U"  
 1:PBT  
 2:PA6T  
 3:PA9T  
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X	X'	UNITS	东莞市铀高电子制品有限公司						
5	CLIP	STAINLESS STEEL	1		X. ±0.35	X.' ±2'	mm	TITLE:		PART NO.:				
4	BACK COVER	SPCC	1	PLATED NICKEL	.X ±0.3	.X' ±1'	MAT'L	USAF AF 单层全包 90°		USAF-04*N-1*R605				
3	HOUSING	PBT	1	UL94V-0	.XX ±0.25	.XX'	SEE NOTE	DR: gan 2012/6/29		DWG NO.:				
2	SHELL	SPCC	1	PLATED NICKEL	.XXX ±0.15	.XXX'	FINISH	CHKD: gan 2012/6/29		AII-R605				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY	APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
											1:1	1/1	B	