
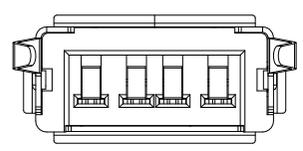
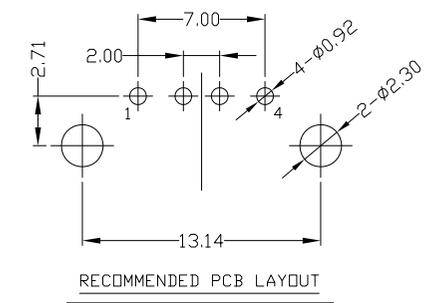
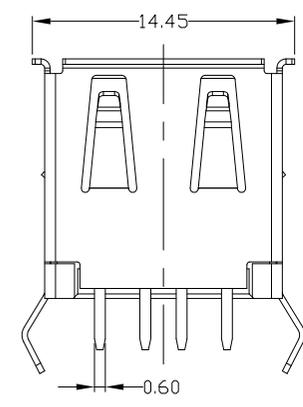
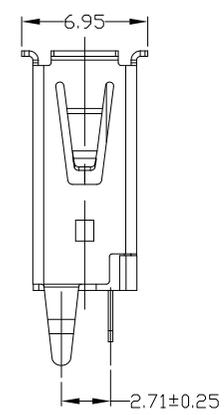
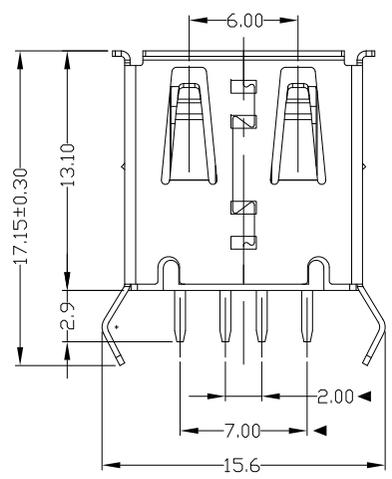
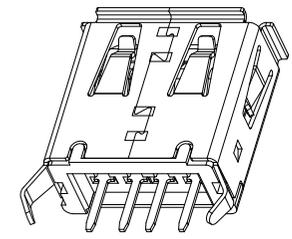


REV	LTR	DESCRIPTION	DATE	REVISER	APPD

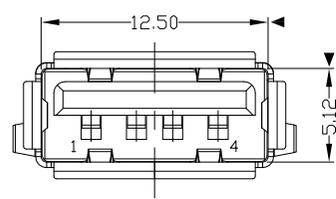

NOTES:
 1) ELECTRICAL:
 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 2) INSULATION RESISTANCE: 1000MΩ MIN;
 3) CONTACT RESISTANCE: 30mΩ MAX;
 4) WITHSTANDING VOLTAGE: 500V AC;
 5) OPERATING TEMPERATURE: -55°C TO +85°C.
 2) Mechanical:
 1) Mating Force: 35N MAX
 2) Unmating Force: 10N MIN.
 3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
 USAF-04*N-1*P62
 W: WHITE
 B: BLACK
 1:PA6T
 2:PA6T
 3:PA9T
 4:LCP
 1Au 1U"
 6Au 30U"

Bill of materials:

E	3	HOUSING	PBT+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	UNITS	mm	东莞市铀高电子制品有限公司			
	2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'	MAT'L			SEE NOTE		
	1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	FINISH	SEE NOTE	TITLE: USB A/F 180° DIP 13.1mm			
	NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY	DR: gan 2012/6/30	PART NO.: USAF-04*N-1*P62		
									APPD:	DWG NO.: AII-P62			
										SCALE: 1:1	SHEET: 1/1	REV: B	CUSTOMER DRAWING