

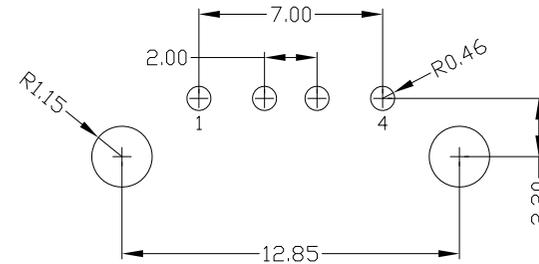
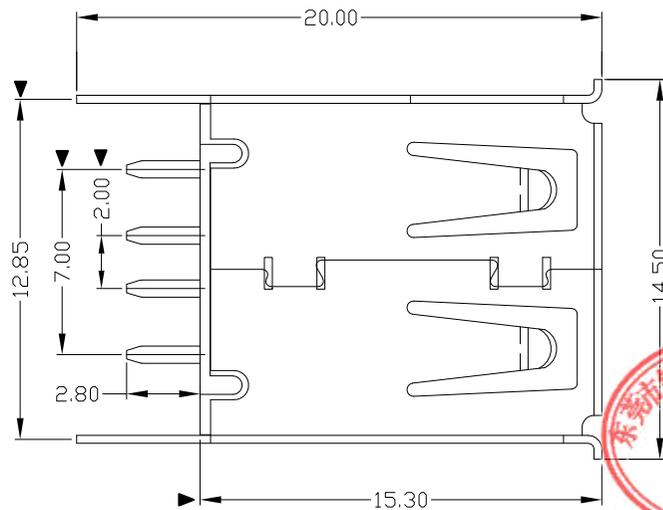


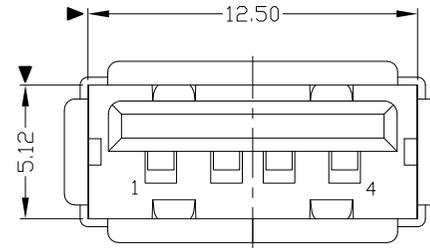

RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

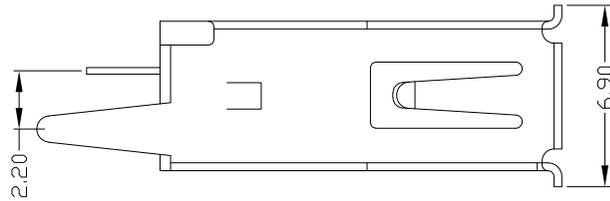

RECOMMENDED PCB LAYOUT

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- Mating Force: 35N MAX
- Unmating Force: 10N MIN.

3. NOTE: 1. DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*P88
 1: Au 1U*
 6: Au 30U*
 W: WHITE
 B: BLACK
 1: PBT
 2: PA6T
 3: PA9T
 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司				
4	COVER	PBT+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	SEE NOTE	TITLE: USB A/F 180° DIP长体 (直脚15.30)		PART NO.: USAF-04*N-1*P88	
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.3	.X' ±1'		DR: gan 2012/7/03		DWG NO.: AII-P88	
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'		CHKD: gan 2012/7/03		SCALE SHEET REV. CUSTOMER DRAWING	
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'		APPD: gan 2012/7/03		1:1 1/1 B	
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.						

