







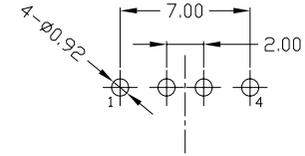


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

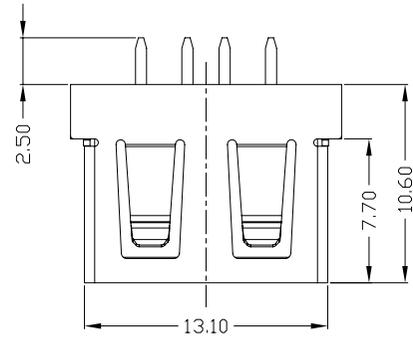

RECOMMENDED PCB LAYOUT

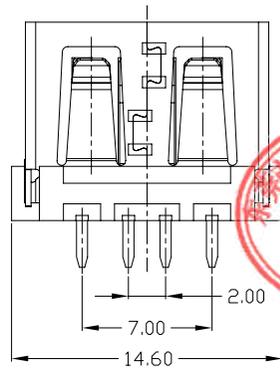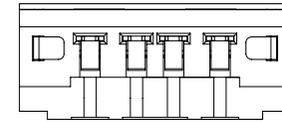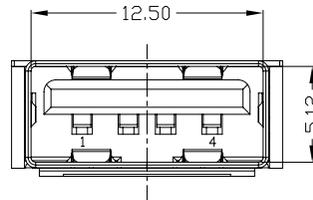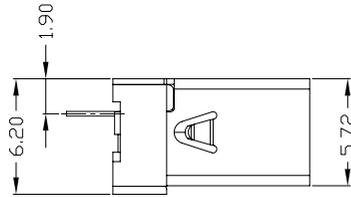

NOTES:

1. ELECTRICAL:
 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 2) INSULATION RESISTANCE: 1000MΩMIN;
 3) CONTACT RESISTANCE: 30mΩMAX;
 4) WITHSTANDING VOLTAGE: 500V AC;
 5) OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:
 1) Mating Force: 35N MAX
 2) Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*P603

- 1: Au 1U*
- 6: Au 30U*
- W: WHITE
- B: BLACK
- 1: PBT
- 2: PA6T
- 3: PA9T
- 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	东 莞 市 铀 高 电 子 制 品 有 限 公 司	
					.X ±0.3	.X.* ±1*	mm		
3	HOUSING	PBT+30%GF	1	UL94V-0	.XX ±0.25	.XX*	MAT'L	TITLE: USB AF DIP 180度 (10.60) 外壳无脚	
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XXX ±0.15	.XXX*	SEE NOTE		PART NO.: USAF-04*N-1*P603
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.			DR: gan 2016/9/20	DWG NO.: AII-P603
NO	PARTS	MATERIAL	QTY	FINISHING	Q'TY			CHKD: gan 2016/9/20	SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING