

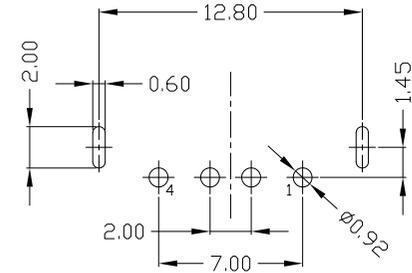

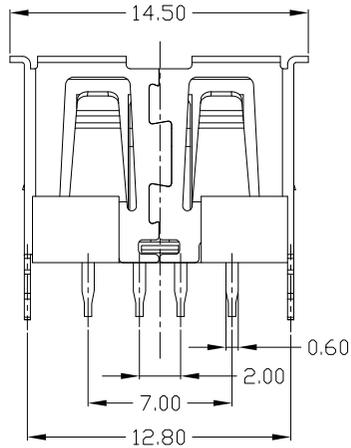


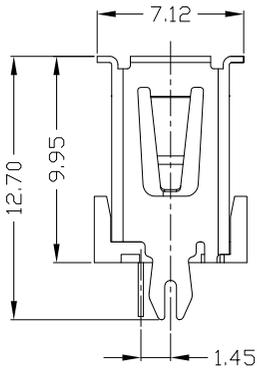


RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.



RECOMMENDED PCB LAYOUT



- NOTES:
- 1) ELECTRICAL:
    - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
    - 2) INSULATION RESISTANCE: 1000MΩMIN;
    - 3) CONTACT RESISTANCE: 30mΩMAX;
    - 4) WITHSTANDING VOLTAGE: 500V AC;
    - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
  - 2) Mechanical:
    - 1) Mating Force: 35N MAX
    - 2) Unmating Force: 10N MIN.
  - 3) DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04\*N-1\*P604

- 1: Au 1U\*
- 6: Au 30U\*
- 1: PBT
- 2: PA6T
- 3: PA9T
- 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	HOUSING	PBT/LCP+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN

X.	X.* ±2*	UNITS
.X ±0.35	X.* ±2*	mm
.X ±0.3	.X* ±1*	MAT'L
.XX ±0.25	.XX*	SEE NOTE
.XXX ±0.15	.XXX*	FINISH
		SEE NOTE
		Q'TY

<b>东莞市铀高电子制品有限公司</b>			
TITLE: USB AF 10.0 180度 鱼叉脚有卷边		PART NO.: USAF-04*N-1*P604	
DR: gan 2016/9/20		DWG NO.: AII-P604	
CHKD: gan 2016/9/20		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER DRAWING
		B	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.

