

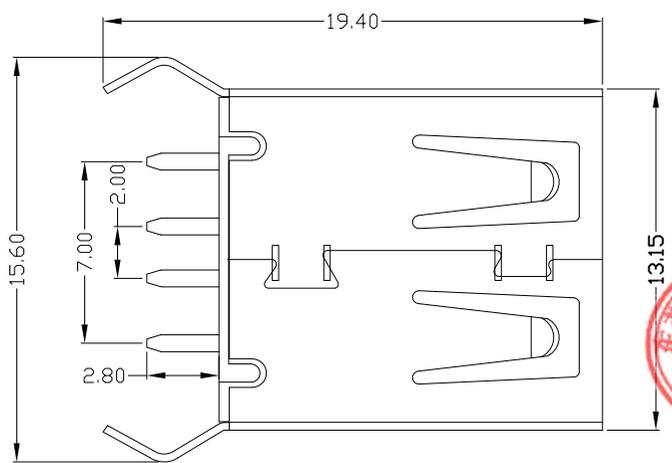
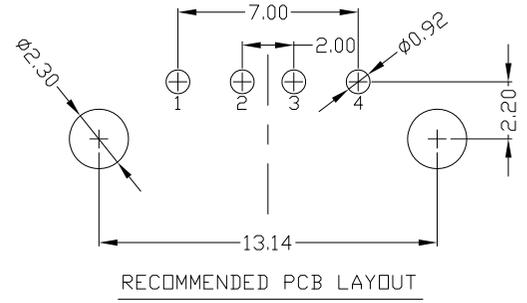


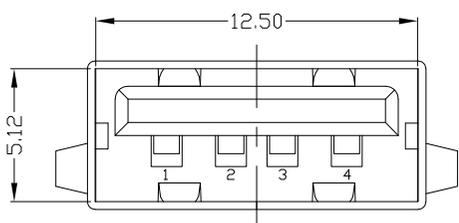

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

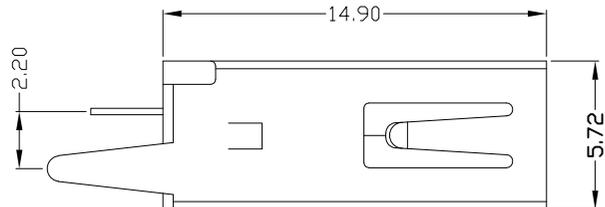

- NOTES:
- 1) ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
 - 2) Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
 3. NOTE: 1. DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.



4. PART NO.
USAF-04*N-1*P804

1:Au 1U*
6:Au 30U*

W: WHITE
B: BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING										
4	COVER	PBT+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	UNITS	mm	东莞市铨高电子制品有限公司 TITLE: USB AF 180 DIP长体 (改脚无卷边) PART NO.: USAF-04*N-1*P804 DR: gan 2013/3/29 DWG NO.: AII-P804 CHKD: gan 2013/3/29 APPD:					
3	HOUSING	PBT/LCP+30%GF	1	UL94V-0	.X ±0.3	.X' ±1'	MAT'L	SEE NOTE						
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XX ±0.25	.XX'	FINISH	SEE NOTE						
1	TERMINAL	COPPER ALLOY	4	Plated Gold in Mating Area; Tin on Solder Tails	.XXX ±0.15	.XXX'	Q'TY	SEE NOTE						
NO	PARTS	MATERIAL	QTY	FINISHING	<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC.</small>				SCALE	SHEET	REV.	CUSTOMER DRAWING		
									1:1	1/1	B			