


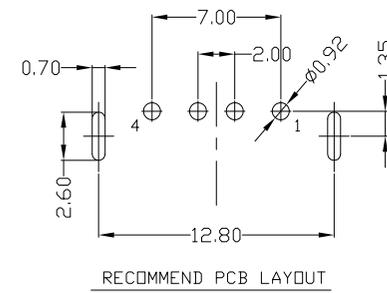
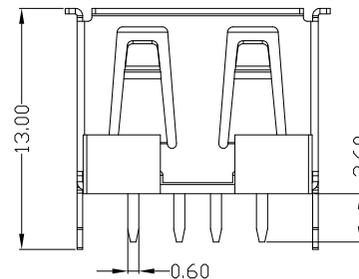
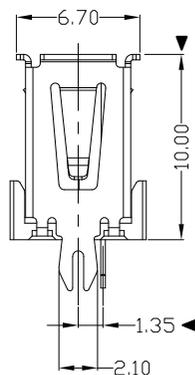


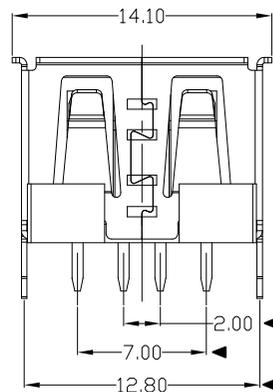

RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.



- NOTES:  
1. ELECTRICAL:  
1) VOLTAGE CURRENT RATING: 2.0AMP,30V AC;  
2) INSULATION RESISTANCE: 1000M $\Omega$  MIN;  
3) CONTACT RESISTANCE: 30m $\Omega$  MAX;  
4) WITHSTANDING VOLTAGE: 500V AC;  
5) OPERATING TEMPERATURE:-55°C TO +85°C.  
2. Mechanical:  
1) Mating Force: 35N MAX  
2) Unmating Force: 10N MIN.  
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

- USAF-04XN-4XPA7  
1:Au 1U\*  
6:Au 30U\*  
T:TIN  
N:NICKEL  
W:WHITE  
B:BLACK  
1:PBT  
2:PA6T  
3:PA9T  
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	HOUSING	LCP+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN

UNITS	mm	<b>东莞市铀高电子制品有限公司</b>
MAT'L	SEE NOTE	
FINISH	SEE NOTE	
Q'TY	SEE NOTE	
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC</small>		TITLE: USAF AF 180° DIP 10.0MM卷边(1.35) DR: gan 2017/3/24 CHKD: gan 2017/3/24 APPD:
		PART NO.: USAF-04XN-4XPA7 DWG NO.: AII-PA7 SCALE: 1:1 SHEET: 1/1 REV.: B CUSTOMER DRAWING