




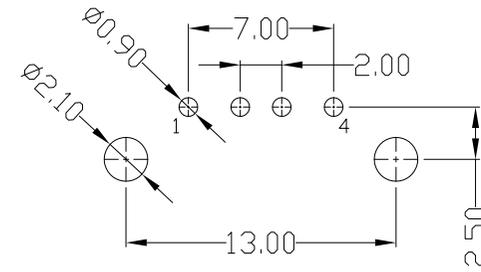


RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

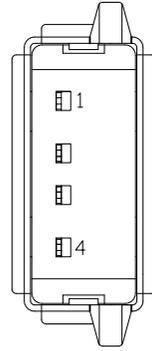

RECOMMENDED PCB LAYOUT

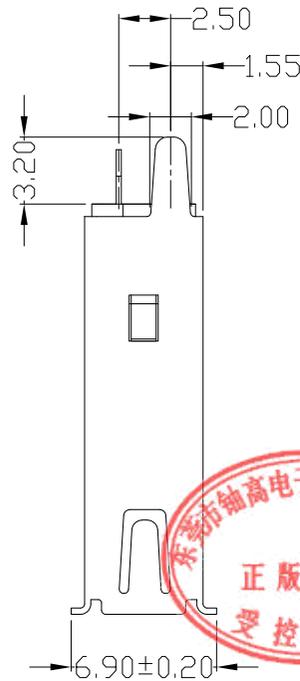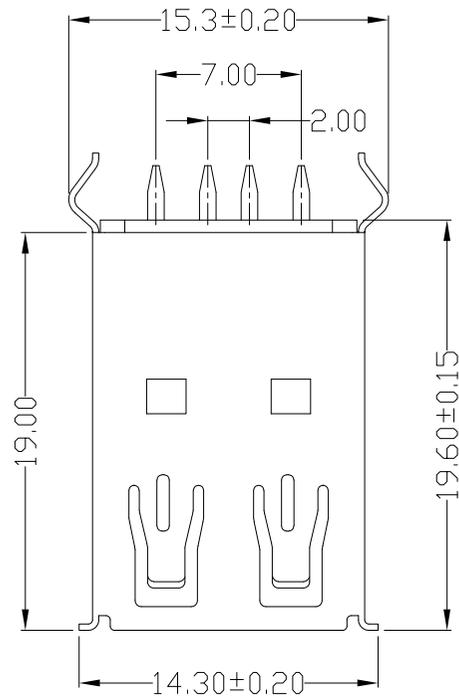

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE:1.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.



4.PART NO.

USAF-04*N-1*PZ26-S
 1:1Au 1U*
 6:Au 30U*
 W:WHITE
 B:BLACK
 1:PBT
 2:PA6T
 3:PA9T
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	DIMENSIONS		UNITS	MATERIAL	SEE NOTE	FINISH	SEE NOTE	Q'TY	TITLE: USB AF DIP 180度 全包 卷边弯脚有后塞 19.6			
					X. ±0.35	X.' ±2'							mm	PART NO.: USAF-04XN-1XPZ26-S		
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.35	X.' ±2'	mm	DONGGUAN YU GAO ELECTRONIC PRODUCTS CO., LTD.				DR: Ricky 2018/11/21	DWG NO.: AII-PZ26-S			
2	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X' ±1'						CHKD: Ricky 2018/11/21	SCALE: 1:1	SHEET: 1/1	REV: B	CUSTOMER DRAWING
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'						APPD:				

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.

