

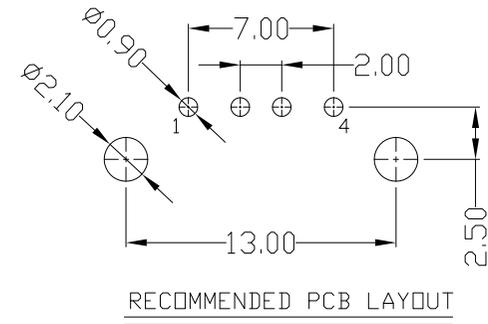


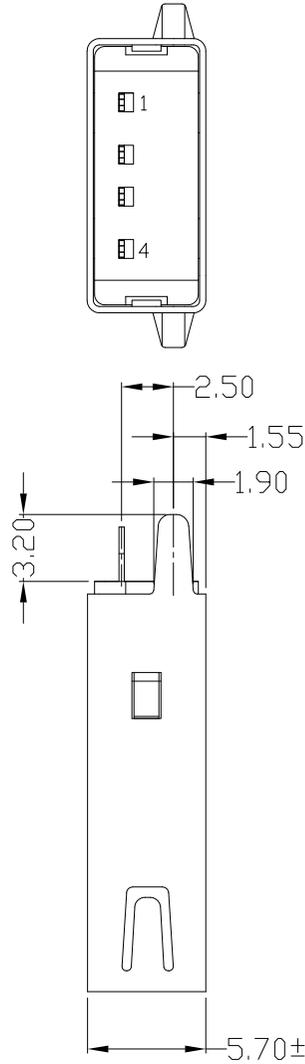

RoHS
Compliant
2002/95/EC


REV	LTR	DESCRIPTION	DATE	REVISER	APPD

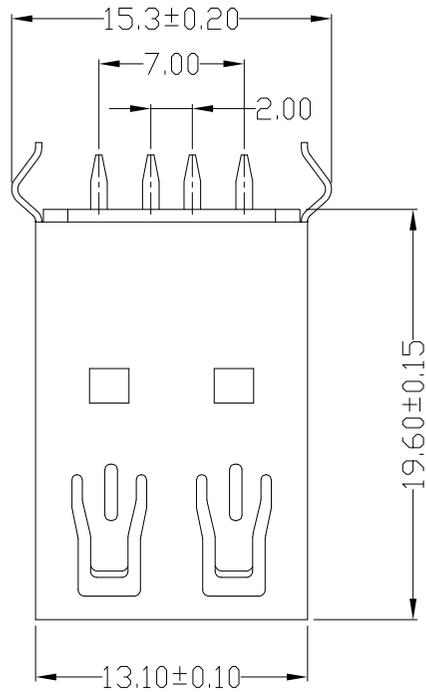

NOTES:

1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 2AMP,30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	DIMENSIONS		UNITS	MATERIAL	SEE NOTE	FINISH	SEE NOTE	Q'TY	CUSTOMER DRAWING									
					X. ±0.35	X.' ±2'							mm	TITLE:	PART NO.:	DR:	DWG NO.:	SCALE	SHEET	REV.	CUSTOMER DRAWING	
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.35	X.' ±2'	mm	东莞市铀高电子制品有限公司	SEE NOTE	SEE NOTE	SEE NOTE	SEE NOTE	TITLE:	PART NO.:	DR:	DWG NO.:	SCALE	SHEET	REV.	CUSTOMER DRAWING		
2	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X' ±1'	MAT'L						USAF AF DIP 180度 全包 无卷边弯脚有后塞 19.6	USAF-04XN-1XPZ27-S	Ricky	2018/11/22	AII-PZ27-S	1:1	1/1	B		
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX'	SEE NOTE						1:Au 1U" 6:Au 30U"	1:PBT 2:PA6T 3:PA9T 4:LCP	Ricky	2018/11/22						
					.XXX ±0.15	.XXX'	SEE NOTE															

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC.