

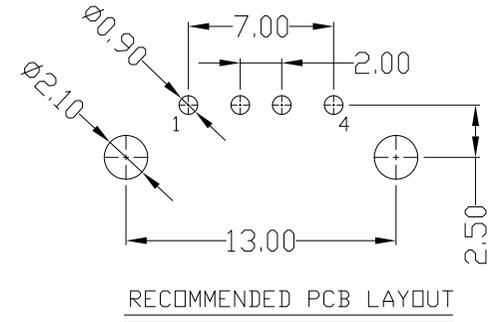
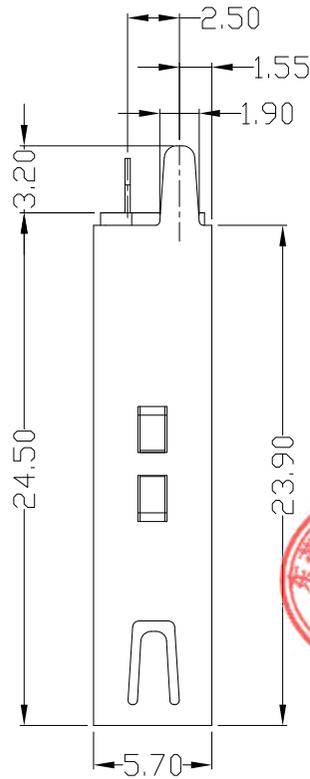


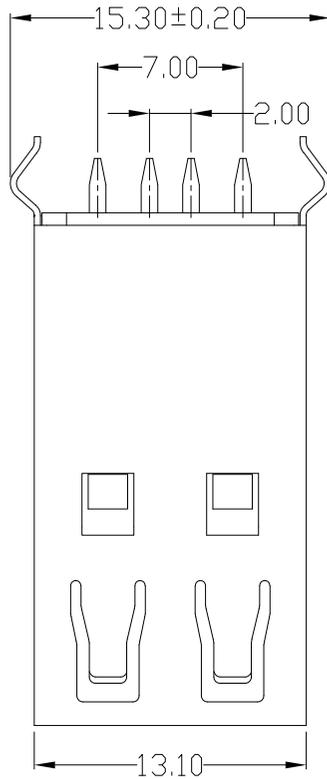

RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

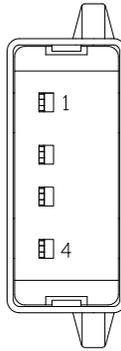

1. ELECTRICAL:
- VOLTAGE CURRENT RATING: 2AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:
- Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
USAF-04*N-1*PZ219-S

1Au 1U"
6Au 30U"

W/WHITE
B/BLACK
1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X.	X' ±2'	UNITS	东莞市铀高电子制品有限公司				
					.X ±0.35	.X' ±1'						mm
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.3	.X' ±1'	MAT'L	东莞市铀高电子制品有限公司 TITLE: USB AF DIP 180度 全包 无卷边弯脚有后塞 24.5 PART NO.: USAF-04XN-1XPZ219-S DR: Ricky 2018/11/23 DWG NO.: AII-PZ219-S CHKD: Ricky 2018/11/23 APPD:	SCALE: 1:1 SHEET: 1/1 REV: B CUSTOMER DRAWING			
2	SHELL	SPCC	1	PLATED NICKEL	.XX ±0.25	.XX'	SEE NOTE					
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	SEE NOTE					
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY				