


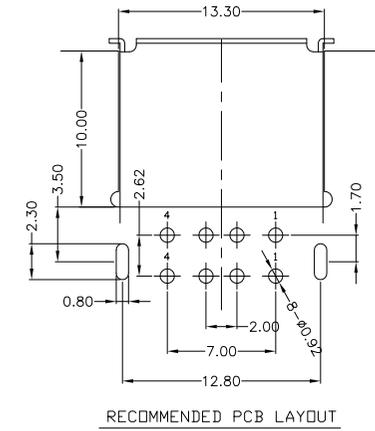

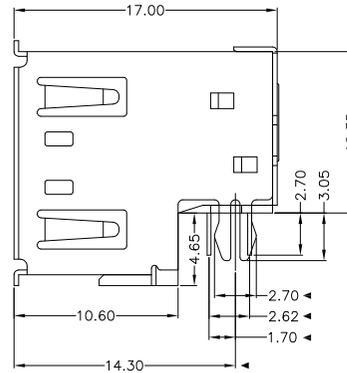




RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD



NOTES:

- 1) ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 1.5AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -20°C TO +60°C.
- 2) Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-08XN-1XR31
 1:Au 1U"
 5:Au 15U"
 6:Au 30U"
 W:WHITE
 B:BLACK
 1:PBT
 2:PA6T
 3:PA9T
 4:LCF

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING				
6	CLIP	STAINLESS STEEL	1	PLATED NICKEL	X. ±0.35	X.' ±2'	UNITS	mm
5	BOTTOM PLUG	PBT+30%GF	1	UL94V-0	.X ±0.3	.X' ±1'	MAT'L	
4	BACK SHELL	SPCC	1	PLATED NICKEL	.XX ±0.25	.XX'	SEE NOTE	
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.15	.XXX'	FINISH	
2	HOUSING	PBT+30%GF	1	UL94V-0			SEE NOTE	
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN			Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.

东莞市铀高电子制品有限公司			
TITLE: USB AF 90° 双层沉板正向		PART NO.: USAF-08XN-1XR31	
DR: Ricky 2014/04/28		DWG NO.: AII-R31	
CHKD: Ricky 2014/04/28		SCALE	SHEET
APPD:		1:1	1/1
REV.	B	CUSTOMER	DRAWING